

## SDR Series regulator



## Symbol



## Product feature

1. Back pressure structure, compact type, cost-effective, installation time saving.
2. Broad regulating range; low-pressure type is optional other than the standard type; stable output pressure; applicable to situation which has low expectation on output pressure but high expectation on performance and cost-effectiveness.
3. Single unit installation; easy to mount

## Specification

| Model             | SDR100-M5             | SDR100-06 | SDR200-06 | SDR200-08 | SDR100L-M5           | SDR100L-06 | SDR200L-06 | SDR200L-08 |
|-------------------|-----------------------|-----------|-----------|-----------|----------------------|------------|------------|------------|
| Fluid             | Air                   |           |           |           |                      |            |            |            |
| Pressure range    | 0.05~0.9MPa(7~130psi) |           |           |           | 0.03~0.4MPa(4~57psi) |            |            |            |
| Max. pressure     | 1.0MPa(145psi)        |           |           |           |                      |            |            |            |
| Proof pressure    | 1.5MPa(215psi)        |           |           |           |                      |            |            |            |
| Temperature range | -20~70℃               |           |           |           |                      |            |            |            |
| Port size [Note1] | M5                    | 1/8"      |           | 1/4"      | M5                   | 1/8"       |            | 1/4"       |

[Note1] G thread is available.

## Ordering code


SDR 200 08 L □ □ 1 G

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

| ① Model                   | ② Series code   | ③ Port size          | ④ Type code                          | ⑤ Accessories                   | ⑥ Pressure gauge                              | ⑦ Scale                    | ⑧ Thread type |
|---------------------------|-----------------|----------------------|--------------------------------------|---------------------------------|-----------------------------------------------|----------------------------|---------------|
| SDR: SDR series regulator | 100: 100 series | M5: M5<br>06: 1/8"   | Blank: Standard<br>L: Lower pressure | Blank: Bracket<br>J: No bracket | Blank: Pressure gauge<br>N: No pressure gauge | 1: MPa<br>2: psi<br>3: bar | G: G Thread   |
|                           | 200: 200 series | 06: 1/8"<br>08: 1/4" |                                      |                                 |                                               |                            |               |

## Inner structure and material of major parts

## SDR Series




| No. | Item                | Material           |
|-----|---------------------|--------------------|
| 1   | Body                | Aluminum alloy     |
| 2   | Needle gasket       | NBR                |
| 3   | O-ring              | NBR                |
| 4   | O-ring              | NBR                |
| 5   | Fixed ring          | POM                |
| 6   | Identification ring | POM                |
| 7   | Adjusting seat      | POM                |
| 8   | Adjusting pillar    | Free-cutting steel |
| 9   | Adjusting button    | POM                |
| 10  | Adjusting nut       | Steel              |
| 11  | Adjusting spring    | SWC                |
| 12  | Piston rod          | POM                |
| 13  | Adjusting seat      | POM                |
| 14  | Return spring       | SUS304             |


## SDR Series regulator

### Pressure and feature of flow

#### Pressure chart


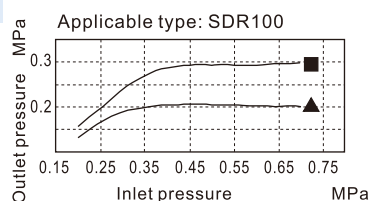


▲ Inlet pressure 0.2MPa ■ Inlet pressure 0.3MPa

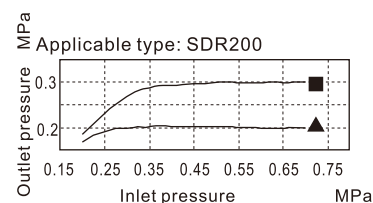


▲ Inlet pressure 0.2MPa ■ Inlet pressure 0.3MPa

#### Flow chart

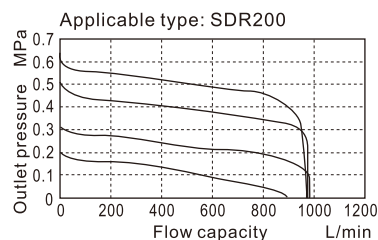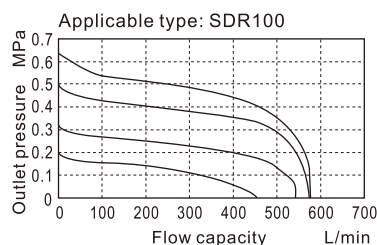

### Dimensions

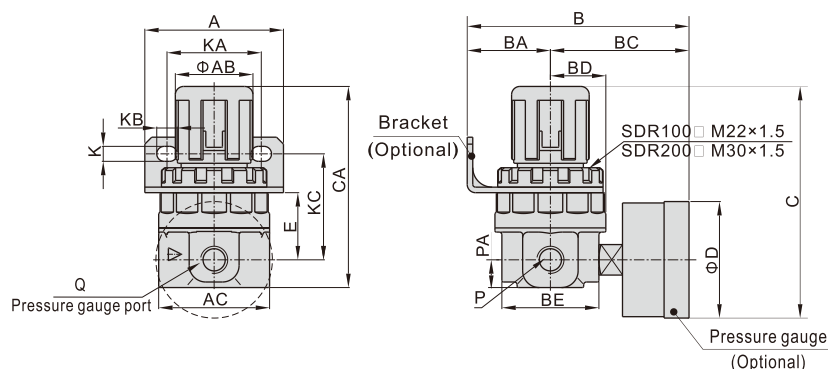

| Model\Item | A  | AB | AC | B    | BA | BC   | BD   | BE | C    | CA   | D  | E  | K   | KA | KB  | KC | P    | PA  | Q     |
|------------|----|----|----|------|----|------|------|----|------|------|----|----|-----|----|-----|----|------|-----|-------|
| SDR100□M5  | 35 | 20 | 32 | 65.5 | 26 | 39.5 | 14.5 | 29 | 62.5 | 54.5 | 33 | 17 | 5.5 | 22 | 7   | 29 | M5   | 7.5 | 1/16" |
| SDR100□06  | 35 | 20 | 32 | 65.5 | 26 | 39.5 | 14.5 | 29 | 62.5 | 54.5 | 33 | 17 | 5.5 | 22 | 7   | 29 | 1/8" | 7.5 | 1/16" |
| SDR200□06  | 50 | 28 | 40 | 80   | 30 | 50   | 20   | 35 | 83.5 | 72.5 | 42 | 24 | 5.5 | 34 | 7.5 | 38 | 1/8" | 10  | 1/8"  |
| SDR200□08  | 50 | 28 | 40 | 80   | 30 | 50   | 20   | 35 | 83.5 | 72.5 | 42 | 24 | 5.5 | 34 | 7.5 | 38 | 1/4" | 10  | 1/8"  |

Note: Bracket and pressure gauge are optional.

### Attentions of application

Unlock the regulating knob before pressure adjustment, then lock it after the adjustment. Otherwise, may cause the regulating knob damage or the outlet pressure change.

1. Pull the regulating knob to unlock, when the orange marking ring below the regulating knob appears, indicating that the regulating knob is unlocked.
2. Push the regulating knob to lock, when the orange marking ring below the regulating knob disappears completely, indicating that the regulating knob is locked.

