


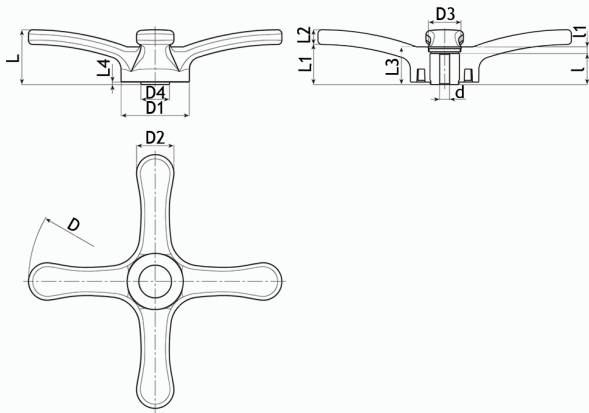

Description

Material:

- handwheel: reinforced and stabilised polyamide(PA-GF); oils and greases resistant, black (RAL 9011);
- insert: zinc plated steel insert with smooth through-hole (H10 tolerance).

Characteristics:

- alternative cap colour: orange (RAL 2004); blue (RAL 5015); yellow (RAL 1021); red (RAL 3000); green (RAL 6024); black (RAL 9011); contact us for more information;
- surface is satin;
- central cap is grey polyamide (RAL 7035);
- hollow underneath hub;
- d1 in the table is the maximum size of the hole (d);
- temperature range from a minimum of -20°C up to a maximum of 135°C.

Special requests:

For fixing system, execution of keyway or square holes, please refer to the technical notes attached to the documentation.

Article Code	D	d	I	D1	D2	D3	D4	d1	L	L1	L2	L3	L4	I1	Material
Al71.0839.3080	308	8	38	83	45,5	34	35,5	26	66	46	20	45,5	3	7,5	PA-GF