


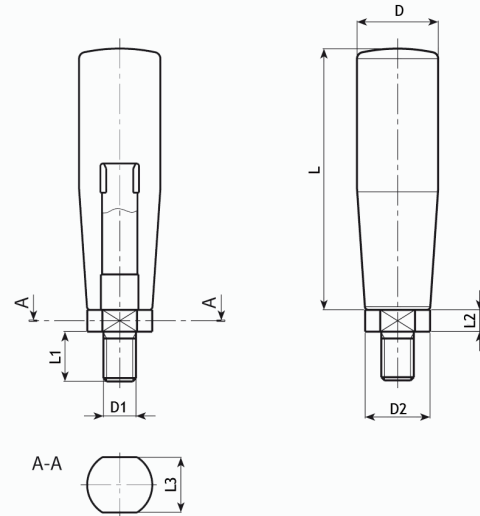

Description

Material:

- handle:** reinforced polyamide (PA-GF); oils and greases resistant;
- insert:** revolving zinc-plated steel threaded stud (tolerance 6g) and brass rotative ring; revolving stainless steel (303) threaded stud (tolerance 6g) and brass rotative ring.

Characteristics:

- surface:** satin;
- colour:** black;
- temperature range from a minimum of -30°C to a maximum of 135°C.

Special request:

It is possible to supply the revolving handle with ring nut in colours as shown in the table, on request and for quantities.

Article Code	D1	L	D	D2	L1	L2	L3	Material
AF30.1039.0690	M10	69	25	14	15	7,0	13	PA-GF / Steel
AF30.1015.0690	M10	70	25	14	15	7,0	13	PA-GF / SST
AF30.1015.0800	M10	80	26	18	15	6,5	16	PA-GF / SST
AF30.1039.0800	M10	80	26	18	15	6,5	16	PA-GF / Steel
AF30.1039.0890	M10	89	27	18	15	6,5	16	PA-GF / Steel
AF30.1015.0890	M10	90	27	18	15	6,5	16	PA-GF / SST
AF30.1215.0800	M12	80	26	18	15	6,5	16	PA-GF / SST
AF30.1239.0800	M12	80	26	18	15	6,5	16	PA-GF / Steel
AF30.1239.0890	M12	89	27	18	15	6,5	16	PA-GF / Steel
AF30.1215.0890	M12	90	27	18	15	6,5	16	PA-GF / SST
AF30.0615.0500	M6	50	20	12	12	5,0	10	PA-GF / SST
AF30.0639.0500	M6	50	20	12	12	5,0	10	PA-GF / Steel
AF30.0815.0600	M8	60	23	14	15	7,0	13	PA-GF / SST
AF30.0839.0600	M8	60	23	14	15	7,0	13	PA-GF / Steel
AF30.0839.0690	M8	69	25	14	15	7,0	13	PA-GF / Steel
AF30.0815.0690	M8	70	25	14	15	7,0	13	PA-GF / SST