


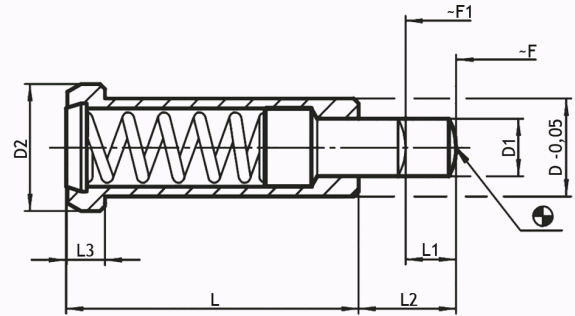

Description

Material:

- body:** free cutting steel, blackened;
- pin:** free cutting steel, blackened;
- spring:** stainless steel.

Characteristics:

- especially designed for the use in tool-making;
- usable as ejection pins and spring stops;
- it is impossible for the complete spring plunger or any of its individual parts to come out of the retaining bore;
- the bore (H7) is equal to D in the table;
- F (N) and F1 (N) in the table is the average statistical value of the spring force;
- temperature range to a maximum of 250°C.

Article Code	D	D1	D2	L	L1	L2	L3	F(N)	F1(N)	Material
BA09.2009.0600	6	2,7	8	20	3,5	6	3,2	10	22	Steel
BA09.2015.0600	6	2,7	8	20	3,5	6	3,2	10	22	SST
BA09.2009.0800	8	3,9	10	24	4,5	8	3,2	30	88	Steel
BA09.2015.0800	8	3,9	10	24	4,5	8	3,2	30	88	SST
BA09.2009.1000	10	5,9	13	30	5,5	10	4,0	42	110	Steel
BA09.2015.1000	10	5,9	13	30	5,5	10	4,0	42	110	SST
BA09.2009.1200	12	7,9	16	36	6,5	12	5,0	50	130	Steel
BA09.2015.1200	12	7,9	16	36	6,5	12	5,0	50	130	SST

