


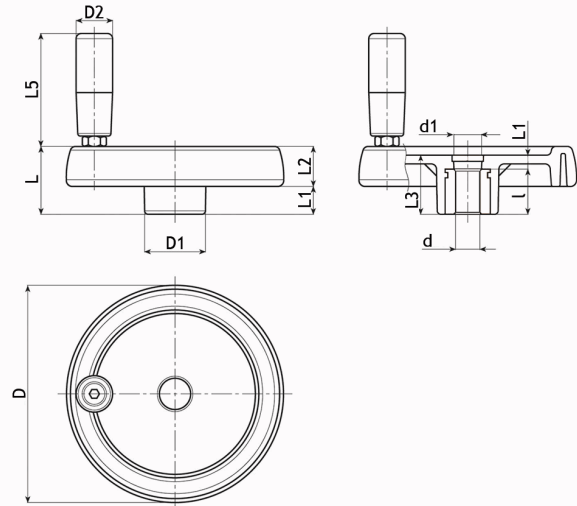

Description

Material:

- handwheel:** reinforced and stabilised polyamide (PA-GF); oils and greases resistant, black (RAL 9011);
- insert:** zinc plated steel insert with smooth through-hole (H10 tolerance);
- side insert for handle:** brass right through threaded bush.

Characteristics:

- alternative cap colour:** orange (RAL 2004); blue (RAL 5015); yellow (RAL 1021); red (RAL 3000); green (RAL 6024); black (RAL 9011); contact us for more information;
- surface is satin;
- central cap is grey polyamide (RAL 7035);
- the handwheel has a revolving handle (AF30);
- d2 in the table is the maximum size of the hole (d);
- temperature range from a minimum of -20°C up to a maximum of 135°C.

Special requests:

For fixing system, execution of keyway or square holes, please refer to the technical notes attached to the catalogue.

Article Code	D	d	l	D1	D2	d1	d2	L	L1	L2	L3	L4	L5	Material
AI23.0539.0810	81	5	20	25	20	16	12	33	16,0	17,0	29	9	55	PA-GF
AI23.0539.1000	100	5	24	30	20	16	16	39	18,5	20,5	34	10	55	PA-GF
AI23.0539.1250	125	5	24	36	23	26	18	44	20,0	24,0	37	13	66	PA-GF
AI23.0839.1500	150	8	32	38	25	26	22	54	25,0	29,0	44	12	76	PA-GF
AI23.0839.1730	173	8	32	40	25	26	22	57	25,5	31,5	47	15	87	PA-GF
AI23.0839.2020	202	8	36	44	27	27	28	59	24,0	35,0	49	13	96	PA-GF
AI23.0839.2490	249	8	36	59	27	36	28	68	29,0	39,0	58	22	96	PA-GF