



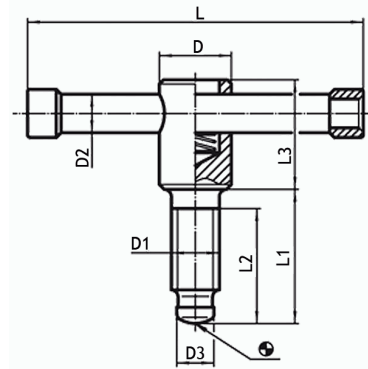

Type 1



Type 2

Description

Material:

·blackened free cutting steel, pressure lug hardened.

Characteristics:

- pressure lug for thrust pad to DIN 6311 form S, for BG10 and BG11;
- D5 in the table is the minimum number of degrees;
- moveable pin held by spring load;
- type 1 without thrust pad, form D; type 2 with thrust pad, form E.

Article Code	D1	L1	D	D2	D3	D4	D5	L	L2	L3	L4	Type	Material
AD72.1009.0400	M10	40	18	8	8,0			80	30	32	1		Steel
AD73.1009.0400	M10	40	18	8	8,0	20	3	80	30	32	43,6	2	Steel
AD72.1009.0500	M10	50	18	8	8,0			80	40	32	1		Steel
AD73.1009.0500	M10	50	18	8	8,0	20	3	80	40	32	53,6	2	Steel
AD72.1209.0500	M12	50	20	10	8,0			100	40	35	1		Steel
AD73.1209.0500	M12	50	20	10	8,0	25	3	100	40	35	54,6	2	Steel
AD72.1209.0600	M12	60	20	10	8,0			100	50	35	1		Steel
AD73.1209.0600	M12	60	20	10	8,0	25	3	100	50	35	64,6	2	Steel
AD72.1609.0550	M16	55	24	13	12,0			120	45	40	1		Steel
AD73.1609.0550	M16	55	24	13	12,0	32	5	120	45	40	60,4	2	Steel
AD72.1609.0700	M16	70	24	13	12,0			120	60	40	1		Steel
AD73.1609.0700	M16	70	24	13	12,0	32	5	120	60	40	75,4	2	Steel
AD72.1609.0900	M16	90	24	13	12,0			120	60	40	1		Steel
AD73.1609.0900	M16	90	24	13	12,0	32	5	120	80	40	95,4	2	Steel
AD72.2009.0550	M20	55	30	16	15,5			140	45	45	1		Steel
AD73.2009.0550	M20	55	30	16	15,5	40	4	140	45	45	60,5	2	Steel
AD72.2009.0700	M20	70	30	16	15,5			140	60	45	1		Steel
AD73.2009.0700	M20	70	30	16	15,5	40	4	140	60	45	75,5	2	Steel
AD72.2009.0900	M20	90	30	16	15,5			140	80	45	1		Steel
AD73.2009.0900	M20	90	30	16	15,5	40	4	140	80	45	95,5	2	Steel
AD72.0809.0400	M8	40	14	6	6,0			60	32	25	1		Steel
AD73.0809.0400	M8	40	14	6	6,0	16	3	60	32	25	43,0	2	Steel
AD72.0809.0500	M8	50	14	6	6,0			60	42	25	1		Steel
AD73.0809.0500	M8	50	14	6	6,0	16	3	60	42	25	53,0	2	Steel