


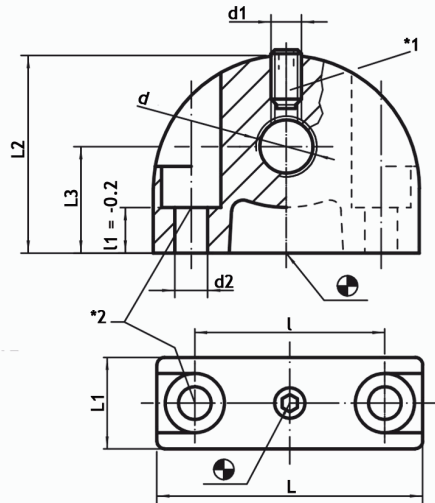

Description

Assembly support and extended applications for index bolts and index plungers.

Material:

- body: plastic coated zinc die-cast, black;
- threaded pin: blackened steel with brass bolt.

Characteristics:

- assembly: index plunger must be assembled in hole d1 on countersink side;
- assembly support and extended applications for index bolts;
- also to be used as a seat for locating bushings AG 51;
- *1: threaded pin with brass bolt;
- *2: countersink cylinder head stud ISO 4762;
- the galvanisation of the thread is one-sided;
- temperature range up to 100°C.

Article Code	d	d1	d2	L	L1	L2	L3	I	l1	Type	Material
AG50.0109.1000	M10	M4	4,3	35	12	26	14	25	6,0	4	Steel
AG50.0162.1000	M10 x 1,0	M4	4,3	35	12	26	14	25	11,5	3	Zamac
AG50.0109.1200	M12	M4	4,3	35	12	26	14	25	6,0	6	Steel
AG50.0162.1200	M12 x 1,5	M4	4,3	35	12	26	14	25	11,5	3	Zamac
AG50.0109.1600	M16	M5	5,3	47	14	34	18	35	10,0	6	Steel
AG50.0162.1600	M16 x 1,5	M5	5,3	47	14	34	18	35	15,5	5	Zamac
AG50.0162.2000	M20 x 1,5	M5	5,3	47	14	34	18	35	15,5	5	Zamac
AG50.0109.0800	M8	M4	4,3	35	12	26	14	25	6,0	2	Steel
AG50.0162.0800	M8 x 1,0	M4	4,3	35	12	26	14	25	11,5	1	Zamac

