


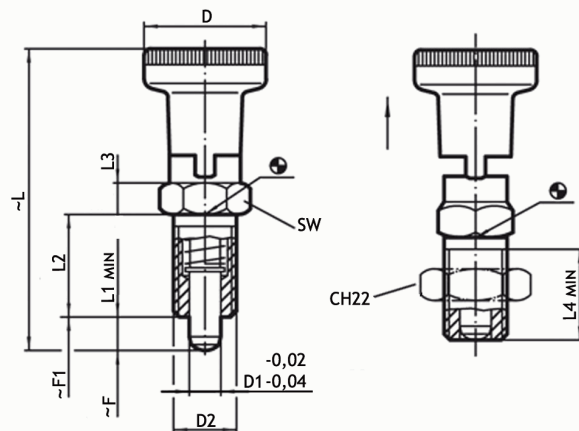

Description

For indexing purposes.

Material:

- body**: blackened free cutting steel; stainless steel 303 (1.4305);
- locking pin**: hardened steel; nickel-plated stainless steel 303 (1.4305);
- knob**: black dull thermoplastic (PA 6); stainless steel 303 (1.4305), not demountable.

Characteristics:

- temperature range from -30°C up to 80°C; temperature range for AG32 serie up to 250°C;
- the knob is pulled-out, turned 90° and secured by a notched catch (when locking pin must not project);
- F and F1 in the table stands for the spring load (N ± statistical average value);
- the screw length can be adapted by distance collars for index plungers (AG55);
- lock nuts (CH22) can be ordered separately.

Article Code	D1	L1	D2	D	L	L2	L3	L4	F(N)	F1(N)	SW	Material
AG02.5109.0500	5	5	M10 x 1,0	21	51,0	17	5	15	6,0	14	12	Steel
AG02.5115.0500	5	5	M10 x 1,0	21	51,0	17	5	15	6,0	14	12	SST / PA
AG32.5115.0500	5	5	M10 x 1,0	21	51,0	17	5	15	6,0	14	12	SST
AG02.5209.0600	6	6	M12 x 1,5	25	61,0	20	6	17	5,5	13	14	Steel
AG02.5215.0600	6	6	M12 x 1,5	25	61,0	20	6	17	5,5	13	14	SST / PA
AG32.5215.0600	6	6	M12 x 1,5	25	61,0	20	6	17	5,5	13	14	SST
AG32.5415.0700	8	7	M16 x 1,5	31	75,5	26	8	23	11,5	28	19	SST
AG02.5409.0800	8	8	M16 x 1,5	31	75,5	26	8	23	11,5	28	19	Steel
AG02.5415.0800	8	8	M16 x 1,5	31	75,5	26	8	23	11,5	28	19	SST / PA
AG02.5509.1000	10	10	M20 x 1,5	31	91,0	33	10	30	28,0	54	22	Steel
AG02.5515.1000	10	10	M20 x 1,5	31	91,0	33	10	30	28,0	54	22	SST / PA
AG32.5515.1000	10	10	M20 x 1,5	31	91,0	33	10	30	28,0	54	22	SST

