


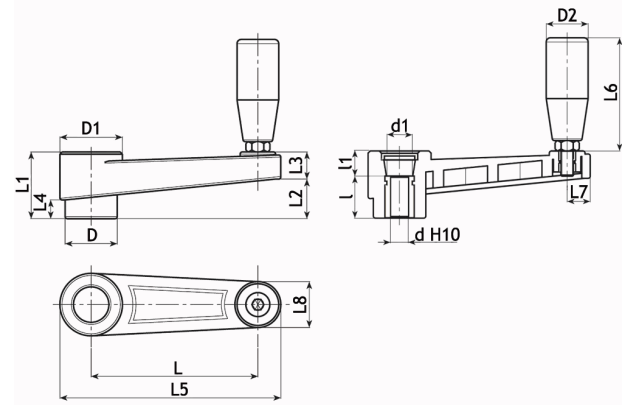

## Description

### Material:

- **crank handle and grip:** reinforced polyamide (PA-GF), oils and greases resistant;
- **main insert:** zinc plated steel insert with smooth through-hole;
- **side insert:** brass right through threaded bush.

### Characteristics:

- **surface:** satin;
- **colour:** black;
- **central cap:** grey polyamide (RAL 7035);
- **alternative cap colour:** orange (RAL 2004); blue (RAL 5015); yellow (RAL 1021); red (RAL 3000); green (RAL 6024); black (RAL 9011); contact us for more information;
- d2 in the table is the maximum size of the hole;
- this crank handle has a rotating handle (AF30);
- temperature range from a minimum of -30°C to a maximum of 135°C.

| Article Code   | L   | d  | D  | D1 | D2 | d1 | d2 | L1 | L2 | L3   | L4   | L5  | L6 | L7   | L8   | I  | I1 | Material      |
|----------------|-----|----|----|----|----|----|----|----|----|------|------|-----|----|------|------|----|----|---------------|
| AH14.0539.0650 | 65  | 5  | 22 | 27 | 20 | 14 | 12 | 30 | 17 | 13,0 | 8,0  | 88  | 56 | 9,5  | 18,0 | 20 | 10 |               |
| AH14.1039.0650 | 65  | 10 | 22 | 27 | 20 | 14 | 12 | 30 | 17 | 13,0 | 8,0  | 88  | 56 | 9,5  | 18,0 | 20 | 10 | PA-GF / Steel |
| AH14.1239.0650 | 65  | 12 | 22 | 27 | 20 | 14 | 12 | 30 | 17 | 13,0 | 8,0  | 88  | 56 | 9,5  | 18,0 | 20 | 10 |               |
| AH14.0539.0800 | 80  | 5  | 26 | 30 | 20 | 18 | 14 | 33 | 19 | 13,0 | 9,0  | 106 | 56 | 11,0 | 21,5 | 24 | 9  |               |
| AH14.1039.0800 | 80  | 10 | 26 | 30 | 20 | 18 | 14 | 33 | 19 | 13,0 | 9,0  | 106 | 56 | 11,0 | 21,5 | 24 | 9  | PA-GF / Steel |
| AH14.1239.0800 | 80  | 12 | 26 | 30 | 20 | 18 | 14 | 33 | 19 | 13,0 | 9,0  | 106 | 56 | 11,0 | 21,5 | 24 | 9  |               |
| AH14.0839.1100 | 110 | 8  | 29 | 33 | 23 | 18 | 14 | 39 | 22 | 14,0 | 11,0 | 138 | 66 | 12,0 | 22,0 | 28 | 11 | PA-GF / Steel |
| AH14.1039.1100 | 110 | 10 | 29 | 33 | 23 | 18 | 14 | 39 | 22 | 14,0 | 11,0 | 138 | 66 | 12,0 | 22,0 | 28 | 11 |               |
| AH14.1239.1100 | 110 | 12 | 29 | 33 | 23 | 18 | 14 | 39 | 22 | 14,0 | 11,0 | 138 | 66 | 12,0 | 22,0 | 28 | 11 | PA-GF / Steel |
| AH14.0839.1400 | 140 | 8  | 35 | 41 | 25 | 22 | 20 | 49 | 34 | 16,0 | 15,0 | 174 | 77 | 13,5 | 25,5 | 30 | 19 | PA-GF / Steel |
| AH14.1239.1400 | 140 | 12 | 35 | 41 | 25 | 22 | 20 | 49 | 34 | 16,0 | 15,0 | 174 | 77 | 13,5 | 25,5 | 30 | 19 |               |
| AH14.1439.1400 | 140 | 14 | 35 | 41 | 25 | 22 | 20 | 49 | 34 | 16,0 | 15,0 | 174 | 77 | 13,5 | 25,5 | 30 | 19 | PA-GF / Steel |
| AH14.1639.1400 | 140 | 16 | 35 | 41 | 25 | 22 | 20 | 49 | 34 | 16,0 | 15,0 | 174 | 77 | 13,5 | 25,5 | 30 | 19 |               |
| AH14.0839.1800 | 185 | 8  | 40 | 45 | 25 | 28 | 22 | 55 | 40 | 16,5 | 16,5 | 220 | 87 | 14,0 | 26,5 | 34 | 21 | PA-GF / Steel |
| AH14.1239.1850 | 185 | 12 | 40 | 45 | 25 | 28 | 22 | 55 | 40 | 16,5 | 16,5 | 220 | 87 | 14,0 | 26,5 | 34 | 21 |               |