


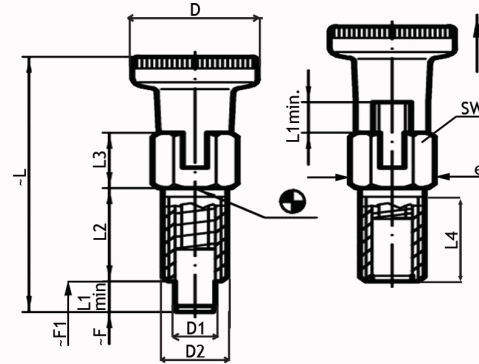

Description

Application is limited to cases not requiring a precise positioning. Simple finish with very small dimensions.

Material:

- **body:** galvanized steel; stainless steel 303 (1.4305);
- **knob:** thermoplastic (PA 6), black, dull;
- **locking pin:** stainless steel 303 (1.4305), h9 tolerance.

Characteristics:

- knob not removeable;
- lock nuts (CH22) can be ordered separately;
- F and F1 in the table stands for the spring load (N ± statistical average value);
- temperature range from -30°C up to 80°C;
- when using locking index plungers, the knob is pulled-out, turned 90° and secured by a notched catch;
- M in the table stands for the maximum tightening torque (in Nm).

Article Code	D1	L1	D2	D	L	L2	L3	L4	e	M	SW	F(N)	F1(N)	Material
AG16.2807.0350	3	3,5	M6	12	32,5	12	7,0	10,0	6,9	2	6	3	12	Steel
AG16.2815.0350	3	3,5	M6	12	32,5	12	7,0	10,0	6,9	2	6	3	12	SST
AG16.5007.0400	4	4,0	M6	12	33,0	12	7,0	10,0	6,9	2	6	3	12	Steel
AG16.5015.0400	4	4,0	M6	12	33,0	12	7,0	10,0	6,9	2	6	3	12	SST
AG16.5107.0500	5	5,0	M8	16	43,5	16	9,5	13,5	9,2	7	8	5	24	Steel
AG16.5115.0500	5	5,0	M8	16	43,5	16	9,5	13,5	9,2	7	8	5	24	SST
AG16.5207.0600	6	6,0	M10	18	52,0	20	10,5	17,0	11,5	15	10	5	21	Steel
AG16.5215.0600	6	6,0	M10	18	52,0	20	10,5	17,0	11,5	15	10	5	21	SST
AG16.5407.0800	8	8,0	M12	21	63,5	24	13,5	20,5	13,8	20	12	6	22	Steel
AG16.5415.0800	8	8,0	M12	21	63,5	24	13,5	20,5	13,8	20	12	6	22	SST