


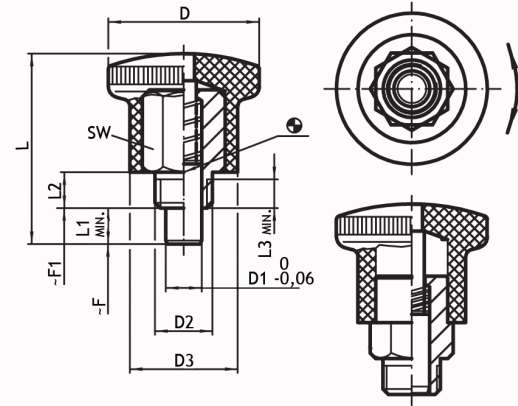

Description

Particularly suitable for screwing into thin walled pieces. Performance in the smallest space requirements.

Material:

- **body:** galvanized steel; stainless steel 303 (1.4305);
- **locking pin:** stainless steel 303 (1.4305);
- **knob:** thermoplastic (PA 6), black, dull, thermoplastic (PA 6), red, dull.

Characteristics:

- **assembly:** screw in the mini index; by lifting the knob, the hexagon will be released for assembly;
- knob is not dismountable
- temperature range from -30°C up to 80°C;
- when using the self-locking type the knob is pulled-out, turned 30° and secured by a notched catch;
- F and F1 in the table stands for the spring load (N ± statistical average value);
- the screw length can be adapted by distance collars for index plungers (AG55).

Article Code	D1	L1	D2	D	D3	L	L2	L3	F(N)	F1(N)	SW	Material
AG06.5007.0500	4	5	M8 x 0,75	21	15	26,5	5	3,5	4,5	12	10	Steel
AG06.5015.0500	4	5	M8 x 0,75	21	15	26,5	5	3,5	4,5	12	10	SST
AG06.6007.0503	4	5	M8 x 0,75	21	15	26,5	5	3,5	4,5	12	10	Steel
AG06.6015.0503	4	5	M8 x 0,75	21	15	26,5	5	3,5	4,5	12	10	SST
AG06.5107.0500	5	5	M8 x 0,75	21	15	26,5	5	3,5	4,5	12	10	Steel
AG06.5115.0500	5	5	M8 x 0,75	21	15	26,5	5	3,5	4,5	12	10	SST
AG06.6107.0503	5	5	M8 x 0,75	21	15	26,5	5	3,5	4,5	12	10	Steel
AG06.6115.0503	5	5	M8 x 0,75	21	15	26,5	5	3,5	4,5	12	10	SST
AG06.5207.0700	6	7	M10 x 1,00	25	18	34,0	7	4,5	5,0	18	12	Steel
AG06.5215.0700	6	7	M10 x 1,00	25	18	34,0	7	4,5	5,0	18	12	SST
AG06.6207.0703	6	7	M10 x 1,00	25	18	34,0	7	4,5	5,0	18	12	Steel
AG06.6215.0703	6	7	M10 x 1,00	25	18	34,0	7	4,5	5,0	18	12	SST
AG06.5307.0700	7	7	M10 x 1,00	25	18	34,0	7	4,5	5,0	18	12	Steel
AG06.5315.0700	7	7	M10 x 1,00	25	18	34,0	7	4,5	5,0	18	12	SST
AG06.6307.0703	7	7	M10 x 1,00	25	18	34,0	7	4,5	5,0	18	12	Steel
AG06.6315.0703	7	7	M10 x 1,00	25	18	34,0	7	4,5	5,0	18	12	SST

