
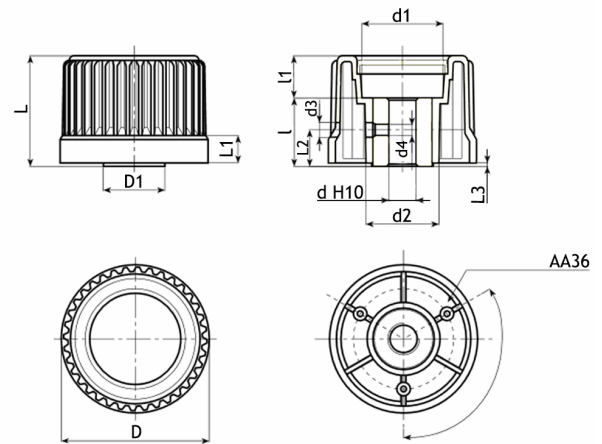


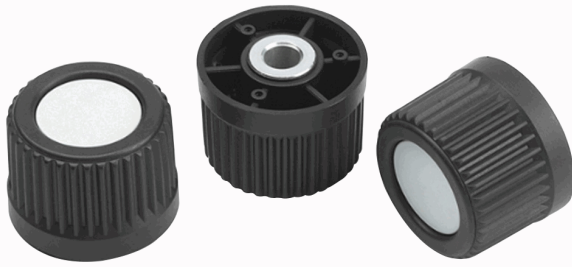

Description

Material:

- knob:** reinforced polyamide (PA-GF);
- insert:** zinc plated steel insert with smooth through-hole (H10 tolerance).

Characteristics:

- surface:** satin;
- colour:** black (RAL 9011);
- central cap:** grey ABS (RAL 7035);
- d5 in the table indicates the maximum size of the bore;
- temperature range from a minimum of -30°C to a maximum of 135°C.

Special request:

It is possible to supply the knurled knob smooth bored insert and knob in colours as shown in the table on request and for quantities.

Article Code	D	d	D1	d1	d2	d3	d4	d5	L	L1	L2	L3	I	I1	Material
AA33.0539.0300	30	8	20	17	20	5,5	M5	12	32	13	16	1,5	26	6	PA-GF / Steel
AA33.0539.0430	43	8	23	23	28	5,5	M5	12	38	14	16	1,5	24	14	PA-GF / Steel
AA33.0539.0540	54	8	27	30	32	5,5	M5	14	56	14	16	1,5	30	14	PA-GF / Steel
AA33.0639.0540	54	12	27	30	32	6,5	M6	14	56	14	16	1,5	30	14	PA-GF / Steel
AA33.0539.0650	65	8	27	36	32	5,5	M5	16	49	14	16	1,5	30	19	PA-GF / Steel
AA33.1239.0650	65	12	27	36	32	6,5	M6	16	49	14	16	1,5	30	19	PA-GF / Steel
AA33.1439.0650	65	14	27	36	32	6,5	M6	16	49	14	16	1,5	30	19	PA-GF / Steel
AA33.0639.0780	78	8	31	50	36	6,5	M6	18	56	15	16	1,5	32	14	PA-GF / Steel