


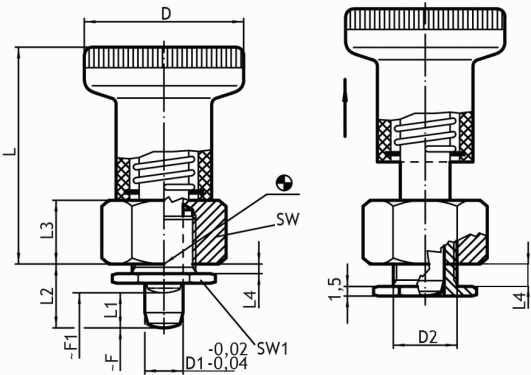

Description

Index plungers with throughgoing bore for thin-walled pieces. By means of a fastening collet, the index plungers can be mounted into pieces having a wall thickness of 1-5 mm.

- Material:**
- body:** galvanized steel;
 - locking pin:** nickel-plated stainless steel 303 (1.4305);
 - knob:** thermoplastic (PA 6), black, dull.

- Characteristics:**
- knob not removeable;
 - temperature range from -30°C up to 80°C.
 - F and F1 in the table stands for the spring load (N ± statistical average value);
 - assembly tool (AG66) can be ordered separately.

Article Code	D1	L2	D	D2	L	L1	L3	L4	F(N)	F1(N)	SW	SW1	Material
AG17.5207.0850	6	8,5	25	10	34	6,0	10	1 - 5	8,5	22	17	14	Steel
AG17.5207.1050	6	10,5	25	10	34	6,0	10	1 - 5	8,5	22	17	14	Steel
AG17.5407.1000	8	10,0	31	12	40	7,5	12	1 - 5	15,5	28	19	16	Steel
AG17.5407.1200	8	12,0	31	12	40	7,5	12	1 - 5	15,5	28	19	16	Steel

