


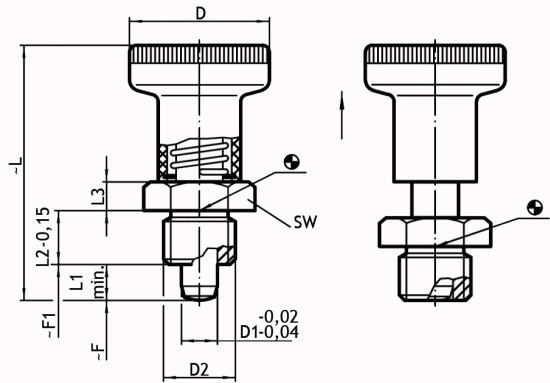

Description

For indexing purposes. The small dimensions are a feature of these index plungers.

Material:

- body: blackened free cutting steel; stainless steel 303 (1.4305);
- locking pin: hardened steel; nickel-plated stainless steel 1.4305;
- knob: thermoplastic (PA 6), black, dull.

Characteristics:

- knob not dismountable;
- temperature range from -30°C up to 80°C;
- lock nuts (CH22) can be ordered separately;
- F and F1 in the table stands for the spring load (N ± statistical average value);
- the screw length can be adapted by distance collars for index plungers (AG55).

Article Code	D1	L1	D2	D	L	L2	L3	SW	F(N)	F1(N)	Material
AG09.5209.0500	6	6	M12 x 1,5	25	45	10	5	17	7	19	Steel
AG09.5215.0500	6	6	M12 x 1,5	25	45	10	5	17	7	19	SST
AG09.5409.0600	8	8	M16 x 1,5	31	54	12	6	19	14	24	Steel
AG09.5415.0600	8	8	M16 x 1,5	31	54	12	6	19	14	24	SST

