


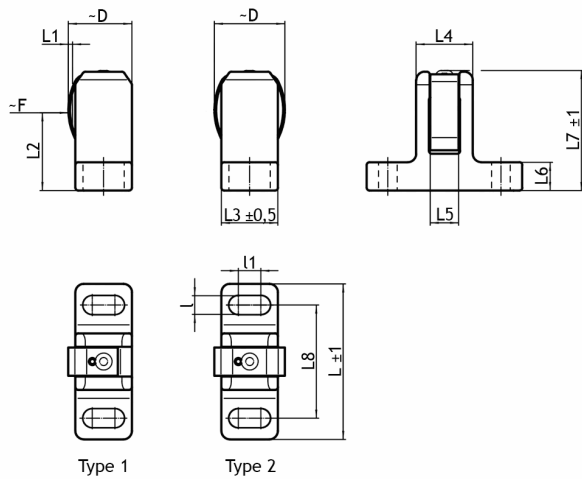

Description

- Material:**
- body: steel, black;
 - spring element: stainless steel.

- Characteristics:**
- the lateral spring plunger with spring steel sheet guarantees a simple and secure positioning of work pieces or components at stops or fixture plates, e.g. in board mounting or before the clamping process in the jig and fixture construction;
 - below L2 is resulting a down hold effect;
 - F (N) in the table is the average statistical value of the spring force;
 - temperature range to a maximum of 250°C;
 - d in the table is the size of the for screw (mm);
 - type 1: one-sided; type 2: double-sided;
 - type 2: allows for serial clamping.

Article Code	L	L1	L4	D	d	L2	L3	L5	L6	L7	L8	I	I1	F(N)	Type	Material
BA32.0109.0550	55	1,5	20	22,5	M6	28,5	20	10	10	43,0	40	6,6	8	55	1	Steel
BA32.0209.0550	55	1,5	20	25,0	M6	28,5	20	10	10	42,5	40	6,6	8	55	2	Steel
BA32.0109.1700	72	1,5	23	29,0	M12	40,5	25	12	15	61,5	50	13,5	6	170	1	Steel
BA32.0209.1700	72	1,5	23	33,5	M12	40,5	25	12	15	61,5	50	13,5	6	170	2	Steel

