


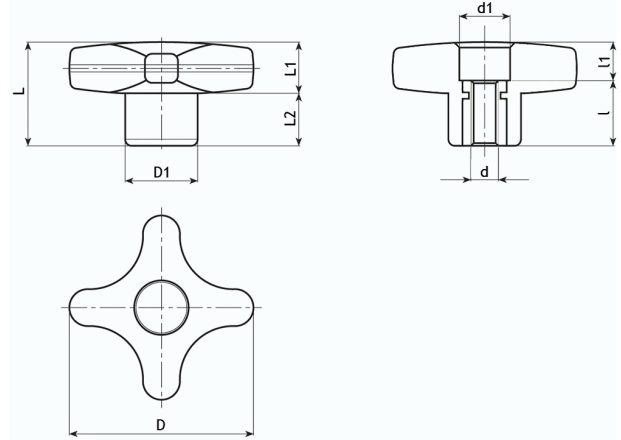

Description

Material:

- knob:** reinforced polyamide (PA-GF); oils and greases resistant;
- insert:** brass right through blind threaded bush (tolerance 6H).

Characteristics:

- surface:** satin;
- color:** black (RAL9011);
- temperature range** from a minimum of -20°C to a maximum of 135°C.

Special request:

It is possible to supply colours as shown in the table on request and for quantities.

Article Code	D	d	D1	d1	L	L1	L2	l	l1	Material
AB51.0437.0320	32	M4	15	10	23,0	11,0	11,0	18	5,0	PA-GF / Brass
AB51.0537.0320	32	M5	15	10	23,0	11,0	11,0	18	5,0	PA-GF / Brass
AB51.0538.0320	32	M5	15	10	23,0	11,0	11,0	18	5,0	PA-GF / SST
AB51.0637.0320	32	M6	15	10	23,0	11,0	11,0	18	5,0	PA-GF / Brass
AB51.0638.0320	32	M6	15	10	23,0	11,0	11,0	18	5,0	PA-GF / SST
AB51.0837.0320	32	M8	15	10	23,0	11,0	11,0	18	5,0	PA-GF / Brass
AB51.0838.0320	32	M8	15	10	23,0	11,0	11,0	18	5,0	PA-GF / SST
AB51.1037.0400	40	M10	16	12	24,5	12,0	12,5	18	6,5	PA-GF / Brass
AB51.1038.0400	40	M10	16	12	24,5	12,0	12,5	18	6,5	PA-GF / SST
AB51.0637.0400	40	M6	16	12	24,5	12,0	12,5	18	6,5	PA-GF / Brass
AB51.0638.0400	40	M6	16	12	24,5	12,0	12,5	18	6,5	PA-GF / SST
AB51.0837.0400	40	M8	16	12	24,5	12,0	12,5	18	6,5	PA-GF / Brass
AB51.0838.0400	40	M8	16	12	24,5	12,0	12,5	18	6,5	PA-GF / SST
AB51.1037.0500	50	M10	20	14	29,0	14,0	15,0	18	11,0	PA-GF / Brass
AB51.1038.0500	50	M10	20	14	29,0	14,0	15,0	18	11,0	PA-GF / SST
AB51.1237.0500	50	M12	20	14	29,0	14,0	15,0	18	11,0	PA-GF / Brass
AB51.1238.0500	50	M12	20	14	29,0	14,0	15,0	18	11,0	PA-GF / SST
AB51.0637.0500	50	M6	20	14	29,0	14,0	15,0	18	11,0	PA-GF / Brass
AB51.0837.0500	50	M8	20	14	29,0	14,0	15,0	18	11,0	PA-GF / Brass
AB51.0838.0500	50	M8	20	14	29,0	14,0	15,0	18	11,0	PA-GF / SST
AB51.1037.0600	60	M10	24	16	34,0	15,5	18,5	18	16,0	PA-GF / Brass
AB51.1038.0600	60	M10	24	16	34,0	15,5	18,5	18	16,0	PA-GF / SST
AB51.1237.0600	60	M12	24	16	34,0	15,5	18,5	18	16,0	PA-GF / Brass
AB51.1238.0600	60	M12	24	16	34,0	15,5	18,5	18	16,0	PA-GF / SST
AB51.1437.0600	60	M14	24	16	34,0	15,5	18,5	18	16,0	PA-GF / Brass
AB51.0837.0600	60	M8	24	16	34,0	15,5	18,5	18	16,0	PA-GF / Brass
AB51.0838.0600	60	M8	24	16	34,0	15,5	18,5	18	16,0	PA-GF / SST