


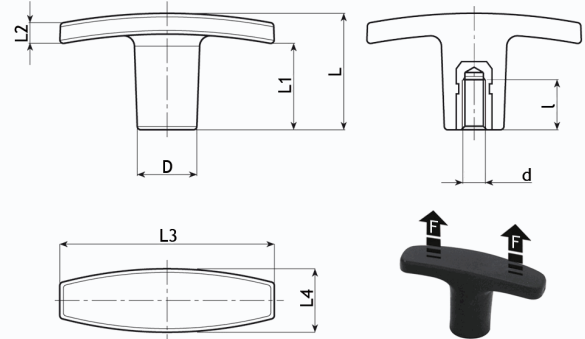

Description

Material:

- handle:** reinforced polyamide, oils and greases resistant;
- insert:** blind brass threaded bush (tolerance 6H); blind stainless steel AISI 303 threaded bush (tolerance 6H).

Characteristics:

- surface:** satin;
- colour:** black;
- temperature range from a minimum of -30°C to a maximum of 135°C.

Special request:

It is possible to supply the T-handle with female threaded insert in colours as shown in the table on request and for quantities.

Article Code	d	L3	D	L	L1	L2	L4	I	F(N)	Material
AF52.1037.0600	M10	60	16,5	33	24	6	18	21	5800	PA-GF / Brass
AF52.1038.0600	M10	60	16,5	33	24	6	18	18	5800	PA-GF / SST
AF52.1037.0720	M10	72	18,0	34	20	10	19	21	6500	PA-GF / Brass
AF52.1038.0720	M10	72	18,0	34	20	10	19	18	6500	PA-GF / SST
AF52.1237.0720	M12	72	18,0	34	20	10	19	17	6500	PA-GF / Brass
AF52.1238.0720	M12	72	18,0	34	20	10	19	15	6500	PA-GF / SST
AF52.0537.0500	M5	50	14,0	24	17	5	15	12	4100	PA-GF / Brass
AF52.0538.0500	M5	50	14,0	24	17	5	15	9	4100	PA-GF / SST
AF52.0537.0600	M5	60	16,5	33	24	6	18	12	5800	PA-GF / Brass
AF52.0637.0500	M6	50	14,0	24	17	5	15	10	4100	PA-GF / Brass
AF52.0638.0500	M6	50	14,0	24	17	5	15	9	4100	PA-GF / SST
AF52.0637.0600	M6	60	16,5	33	24	6	18	10	5800	PA-GF / Brass
AF52.0638.0600	M6	60	16,5	33	24	6	18	9	5800	PA-GF / SST
AF52.0637.0720	M6	72	18,0	34	20	10	19	15	6500	PA-GF / Brass
AF52.0837.0500	M8	50	14,0	24	17	5	15	14	4100	PA-GF / Brass
AF52.0838.0500	M8	50	14,0	24	17	5	15	12	4100	PA-GF / SST
AF52.0837.0600	M8	60	16,5	33	24	6	18	14	5800	PA-GF / Brass
AF52.0838.0600	M8	60	16,5	33	24	6	18	12	5800	PA-GF / SST
AF52.0837.0720	M8	72	18,0	34	20	10	19	20	6500	PA-GF / Brass
AF52.0838.0720	M8	72	18,0	34	20	10	19	19	6500	PA-GF / SST