


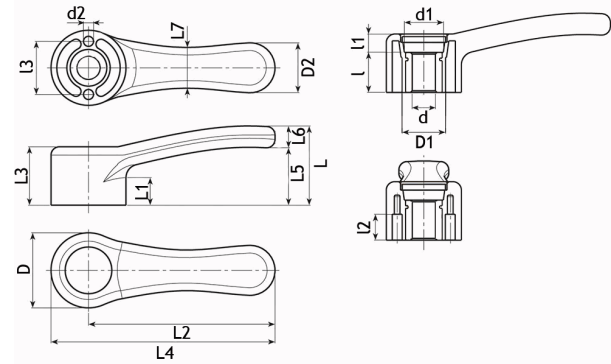

Description

Material:

- **lever:** reinforced polyamide (PA-GF), oils and greases resistant;
- **insert:** zinc plated steel right through smooth bore (tolerance H10);
- **central cap:** polyamide (PA), grey (RAL 7035).

Characteristics:

- **surface:** satin;
- **color:** black (RAL 9011);
- **alternative colours cap:** orange (RAL 2004); blue (RAL 5015); yellow (RAL 1021); red (RAL 3000); green (RAL 6024); grey (RAL 7035); contact us for more information;
- temperature range from a minimum of -30°C to a maximum of 135°C.

Special request:

It is possible to supply colours for the clamping lever smooth insert as shown in the table on request and for quantities.

Article Code	L2	d	D	D1	D2	d1	d2	L	L1	L3	L4	L5	L6	L7	I	I1	I2	I3	Material
AD48.1339.0000	68	5	33	20	20	16,0	4	37	12,0	25	84,5	27	10	17	16	9	11,5	24	PA-GF / Stee
AD48.5339.0000	68	10	33	20	20	16,0	4	37	12,0	25	84,5	27	10	17	16	9	11,5	24	PA-GF / Stee
AD48.1539.0000	86	5	36	22	24	18,0	5	40	13,0	28	104,0	29	11	19	16	12	14,0	26	PA-GF / Stee
AD48.5739.0000	86	10	36	22	24	18,0	5	40	13,0	28	104,0	29	11	19	16	12	14,0	26	PA-GF / Stee
AD48.1639.0000	112	5	45	26	30	23,5	6	47	16,0	36	134,5	35	13	24	24	12	14,5	32	PA-GF / Stee
AD48.7839.0000	112	12	45	26	30	23,5	6	47	16,0	36	134,5	35	13	24	24	12	14,5	32	PA-GF / Stee
AD48.1739.0000	142	5	55	32	37	28,0	8	52	17,5	40	169,5	36	16	30	27	13	18,0	40	PA-GF / Stee