


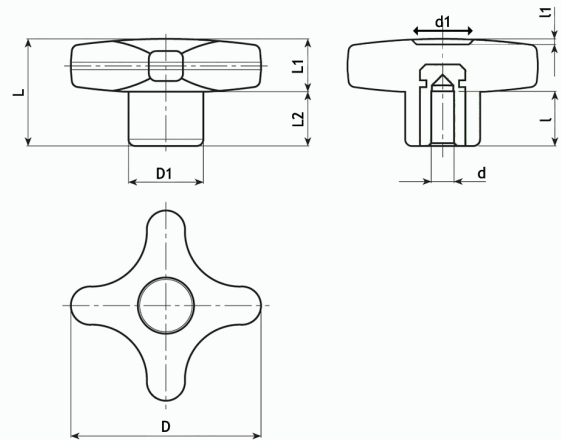

Description

Material:

·**knob:** reinforced polyamide (PA-GF);
 ·**insert:** brass insert with smooth blind hole (tolerance H7); zinc plated steel insert with smooth blind hole (tolerance H10); stainless steel 303 insert with smooth blind hole (tolerance H9).

Characteristics:

·**surface:** satin;
 ·**colour:** black (RAL 9011).

Special request:

It is possible to supply the palm knob with smooth insert in colours as shown in the table on request and for quantities.

Article Code	D	d	D1	d1	L	L1	L2	l	l1	Material
AA48.0639.0320	32	6	13		22,0	11,0	11,0	12		PA-GF / Steel
AA48.0839.0400	32	6	13		22,0	11,0	11,0	12		PA-GF / SST
AA48.0637.0320	32	6	15	11	23,0	11,0	12,0	15	1,5	PA-GF / Brass
AA48.0837.0320	32	8	15	11	23,0	11,0	12,0	15	1,5	PA-GF / Brass
AA48.0637.0400	40	6	16	13	24,5	12,0	12,5	15	1,5	PA-GF / Brass
AA48.1039.0500	40	8	14		24,0	12,0	12,0	14		PA-GF / Steel
AA48.1239.0601	40	8	14		24,0	12,0	12,0	14		PA-GF / SST
AA48.0837.0400	40	8	16	13	24,5	12,0	12,5	15	1,5	PA-GF / Brass
AA48.1037.0400	40	10	16	13	24,5	12,0	12,5	17	1,5	PA-GF / Brass
AA48.0637.0500	50	6	20	14	29,0	14,0	15,0	15	2	PA-GF / Brass
AA48.0837.0500	50	8	20	14	29,0	14,0	15,0	15	2	PA-GF / Brass
AA48.0638.0320	50	10	18		29,0	14,0	15,0	16		PA-GF / Steel
AA48.0838.0400	50	10	18		29,0	14,0	15,0	16		PA-GF / SST
AA48.1037.0500	50	10	20	14	29,0	14,0	15,0	17	2	PA-GF / Brass
AA48.0839.0600	60	8	24	18	34,0	15,5	18,5	18	2	PA-GF / Steel
AA48.1039.0600	60	10	24	18	34,0	15,5	18,5	25	2	PA-GF / Steel
AA48.1038.0500	60	12	20		34,0	16,0	18,0	20		PA-GF / Steel
AA48.1238.0600	60	12	20		34,0	16,0	18,0	20		PA-GF / SST
AA48.1239.0600	60	12	24	18	34,0	15,5	18,5	22	2	PA-GF / Steel