


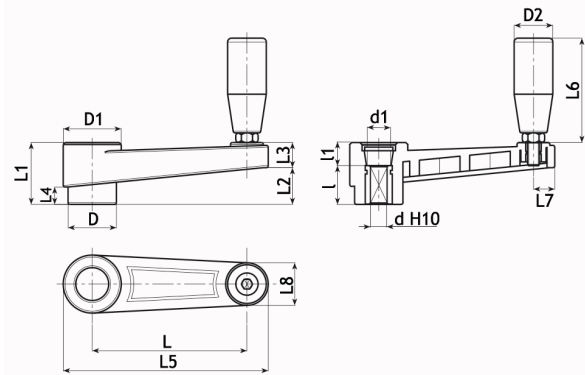

Description

Material:

- **crank handle and grip:** reinforced polyamide (PA-GF), oils and greases resistant;
- **main insert:** black-oxide treated insert, with hexagonal through-hole (H10 tolerance);
- **side laterale:** brass right through threaded bush.

Characteristics:

- **surface:** satin;
- **colour:** black;
- **central cap:** grey polyamide (RAL 7035);
- **alternative cap colour:** orange (RAL 2004); blue (RAL 5015); yellow (RAL 1021); red (RAL 3000); green (RAL 6024); black (RAL 9011); contact us for more information;
- this crank handle has a hexagonal through-hole;
- this crank handle has a rotating handle (AF30);
- temperature range from a minimum of -30°C to a maximum of 135°C.

Article Code	L	d	D	D1	D2	d1	L1	L2	L3	L4	L5	L6	L7	L8	I	I1	Material
AH45.0639.0650	65	6	22	27	20	14	30	17	13,0	8,0	88	56	9,5	18,0	20	10	PA-GF / Steel
AH45.0839.0650	65	8	22	27	20	14	30	17	13,0	8,0	88	56	9,5	18,0	20	10	PA-GF / Steel
AH45.1039.0800	80	10	26	30	20	18	33	19	13,0	9,0	106	56	11,0	22,0	24	9	PA-GF / Steel
AH45.1239.0800	80	12	26	30	20	18	33	19	13,0	9,0	106	56	11,0	22,0	24	9	PA-GF / Steel
AH45.1239.1100	110	12	29	33	21	18	39	22	14,0	11,0	138	66	12,0	22,0	28	11	PA-GF / Steel
AH45.1459.1100	110	14	29	33	21	18	39	22	14,0	11,0	138	66	12,0	22,0	28	11	PA-GF / Steel
AH45.1459.1400	140	14	35	41	23	22	49	34	16,0	15,0	174	76	13,5	25,5	30	19	PA-GF / Steel
AH45.1639.1400	140	16	35	41	23	22	49	34	16,0	15,0	174	76	13,5	25,5	30	19	PA-GF / Steel
AH45.1639.1850	185	16	40	45	25	22	55	40	16,5	16,5	220	86	14,0	26,5	34	19	PA-GF / Steel
AH45.1739.1850	185	17	40	45	25	22	55	40	16,5	16,5	220	86	14,0	26,5	34	19	PA-GF / Steel