


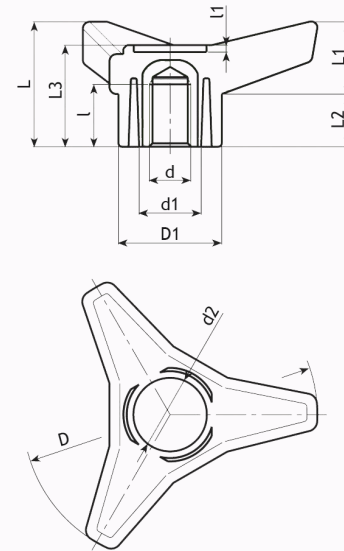

Description

Material:

- **knob:** reinforced polyamide (PA-GF); oils and greases resistant;
- **insert:** brass/ zinc plated steel blind threaded hole (tolerance 6H).

Characteristics:

- hollow underneath hub;
- **surface:** satin;
- **color:** black (RAL 9011);
- temperature range from a minimum of -20°C to a maximum of 135°C.

Special request:

It is possible to supply colours as shown in the table on request and for quantities.

Article Code	D	d	D1	d1	d2	L	L1	L2	L3	l	11	Material
AB56.1037.0850	85	M10	30,0	18	21,0	37	21	16	30,5	14	2	PA-GF / Brass
AB56.1237.0850	85	M12	30,0	18	21,0	37	21	16	30,5	19	2	PA-GF / Brass
AB56.0837.0850	85	M8	30,0	18	21,0	37	21	16	30,5	15	2	PA-GF / Brass
AB56.1037.1050	105	M10	35,0	20	25,0	46	26	19	37,5	17	2	PA-GF / Brass
#AB56.1237.1050	105	M12	35,0	20	25,0	46	26	19	37,5	17	2	PA-GF / Brass
AB56.1437.1050	105	M14	35,0	20	25,0	46	26	19	37,5	19	2	PA-GF / Brass
AB56.0837.1050	105	M8	35,0	20	25,0	46	26	19	37,5	15	2	PA-GF / Brass
AB56.1237.1250	125	M12	42,5	26	28,5	54	31	23	44,0	18	2	PA-GF / Brass
AB56.1437.1250	125	M14	42,5	26	28,5	54	31	23	44,0	18	2	PA-GF / Brass