


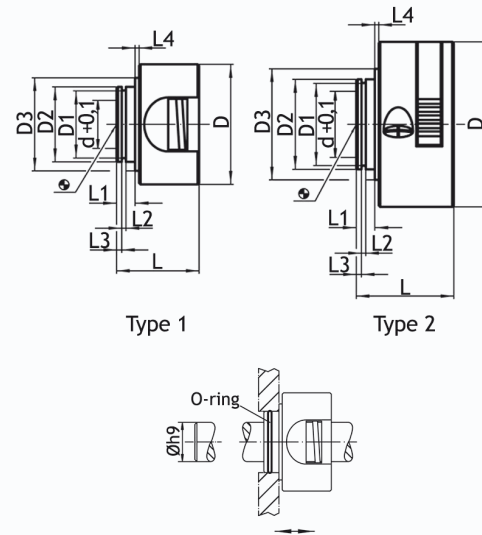

Description

Material:

- body: thermoplastic (PA 6), black;
- inner parts: stainless steel;
- O-ring: NBR.

Characteristics:

- for using positioning, gripping, clamping and as a quick adjustment element on shafts;
- by one-hand operation in pull-direction quickly, self-clamping and vibration-free mounting;
- additional part CI24, O-ring, separately available;
- F1(N) in the table shows holding force axial, one-sided;
- type 1: sizes D 6 - 16; type 2: sizes D 20 - 22;
- temperature range to a maximum of 80°C.

Article Code	d	D	D2	D1	D3	L	L1	L2	L3	L4	F1(N)	Type	Material
BB35.0845.0400	8	40	25	22,4	31	27,5	7	1,7	3,15	0,5	250	1	PA / SST
BB35.1045.0400	10	40	25	22,4	31	27,5	7	1,7	3,15	0,5	250	1	PA / SST
BB35.1245.0400	12	40	25	22,4	31	27,5	7	1,7	3,15	0,5	350	1	PA / SST
BB35.1545.0400	15	40	25	22,4	31	27,5	7	1,7	3,15	0,5	350	1	PA / SST
BB35.1645.0400	16	40	25	22,4	31	27,5	7	1,7	3,15	0,5	350	1	PA / SST
BB35.2045.0550	20	55	30	27,4	37	32,5	7	1,7	2,65	0,5	320	2	PA / SST
BB35.2245.0550	22	55	30	27,4	37	32,5	7	1,7	2,65	0,5	320	2	PA / SST

