


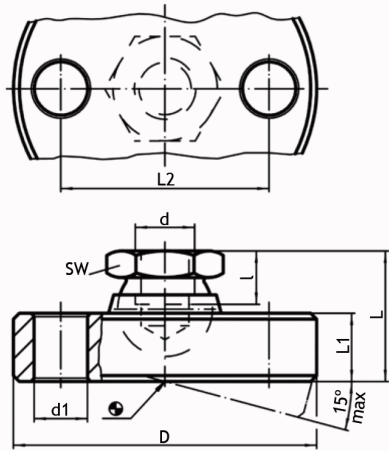

Description

To be used as foot or thrust pad. Including two fastening holes in pad.

Material:

- pad: stainless steel 303 (1.4305);
- ball element: stainless steel 303 (1.4305).

Characteristics:

·F1(kN) in the table is the maximum load capacity for static load.

Article Code	D	d	L	d1	L1	L2	I	F1(kN)	SW	Material
BK15.0615.0004	45	M6	14	6,6	6,5	32	5,0	8	10	SST
BK17.0815.0004	50	M8	18	6,6	8,5	38	7,0	14	13	SST
BK19.1015.0004	60	M10	22	9,0	11,5	44	9,0	16	17	SST
BK20.1215.0004	65	M12	26	9,0	12,5	48	11,0	28	19	SST
BK21.1615.0004	70	M16	32	9,0	13,5	54	13,5	36	24	SST
BK23.2015.0004	80	M20	42	9,0	16,5	64	17,0	44	30	SST
BK25.2415.0004	100	M24	45	11,0	20,5	78	19,0	52	36	SST