


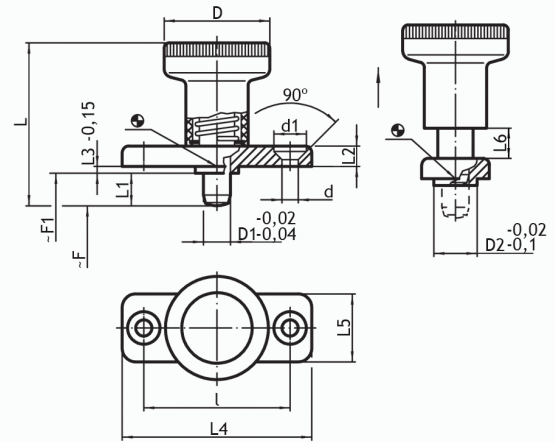

Description

For indexing purposes. For fixing onto thin walled parts. The small dimensions are a feature of these index plungers.

Material:

- flange: galvanized zinc die-cast;
- locking pin: hardened steel; nickel-plated stainless steel 303 (1.4305);
- knob: thermoplastic (PA 6), black, dull.

Characteristics:

- knob not dismountable;
- F and F1 in the table stands for the spring load (N $\pm$ statistical average value);
- temperature range from -30°C up to 80°C .

Article Code	D1	L1	D2	D	L	L2	L3	L4	L5	L6	d	d1	l	F(N)	F1(N)	Material
AG13.5262.0600	6	6	10	25	37	4,5	2,5	40	18	6	4,3	8,3	30	8,5	22	Steel
AG13.5262.0601	6	6	10	25	37	4,5	2,5	40	18	6	4,3	8,3	30	8,5	22	SST
AG13.5262.1400	6	14	10	25	45	4,5	2,5	40	18	6	4,3	8,3	30	8,5	22	Steel
AG13.5262.1401	6	14	10	25	45	4,5	2,5	40	18	6	4,3	8,3	30	8,5	22	SST
AG13.5462.0800	8	8	12	31	44	5,5	2,5	46	20	8	5,3	10,4	34	15,5	28	Steel
AG13.5462.0801	8	8	12	31	44	5,5	2,5	46	20	8	5,3	10,4	34	15,5	28	SST
AG13.5462.1800	8	18	12	31	54	5,5	2,5	46	20	8	5,3	10,4	34	15,5	28	Steel
AG13.5462.1801	8	18	12	31	54	5,5	2,5	46	20	8	5,3	10,4	34	15,5	28	SST

