


Lock adapted to work with 3 points cam.  
Note: Lock milled in with 4 sides (Type B rear lock) - on request.

where:  
**ZZR18** = GH=18  
**ZZR19** = GH=19     **ZZR38** = GH=38  
**ZZR28** = GH=28     **ZZR50** = GH=50

| Insert   |    |    |                 |      |   |   |    |        | Finish [C]        |
|--|----|----|-----------------|------|---|---|----|--------|-------------------|
|  |    |    |                 |      |   |   |    |        | Chrome            |
| D3   | D5 | T8 | T9              | KW 8 | S | N | C9 | KW8-9Z | 01                |
| NAME   |    |    | COMPONENTS      |      |   |   |    |        | MATERIAL          |
| <b>ZZR18, ZZR19,<br/>ZZR28, ZZR38, ZZR50</b>           |    |    | Housing, insert |      |   |   |    |        | Steel             |
|  |    |    | Cam             |      |   |   |    |        | Steel zinc plated |
| <b>ZZR18SN, ZZR19SN,<br/>ZZR28SN, ZZR38SN, ZZR50SN</b> |    |    | Housing, insert |      |   |   |    |        | Stainless steel   |
|  |    |    | Cam             |      |   |   |    |        | Stainless steel   |

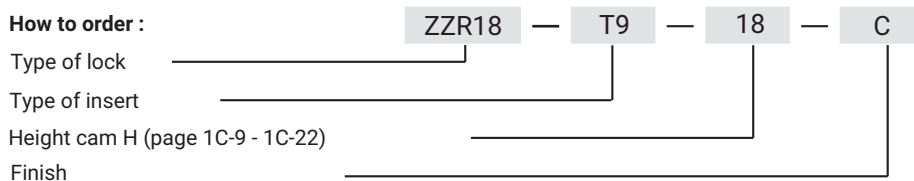

\* possibility to make in another dimension  
 \*\*possibility of making lock grade stainless steel. 316

The lock is fitted with cams from the group: 11, 12, 13, 14, 18, 31, 33, 38, JK-1610.01 (page 1C-9 - 1C-22)