


Locking system with space between holes 105/130 internal locks

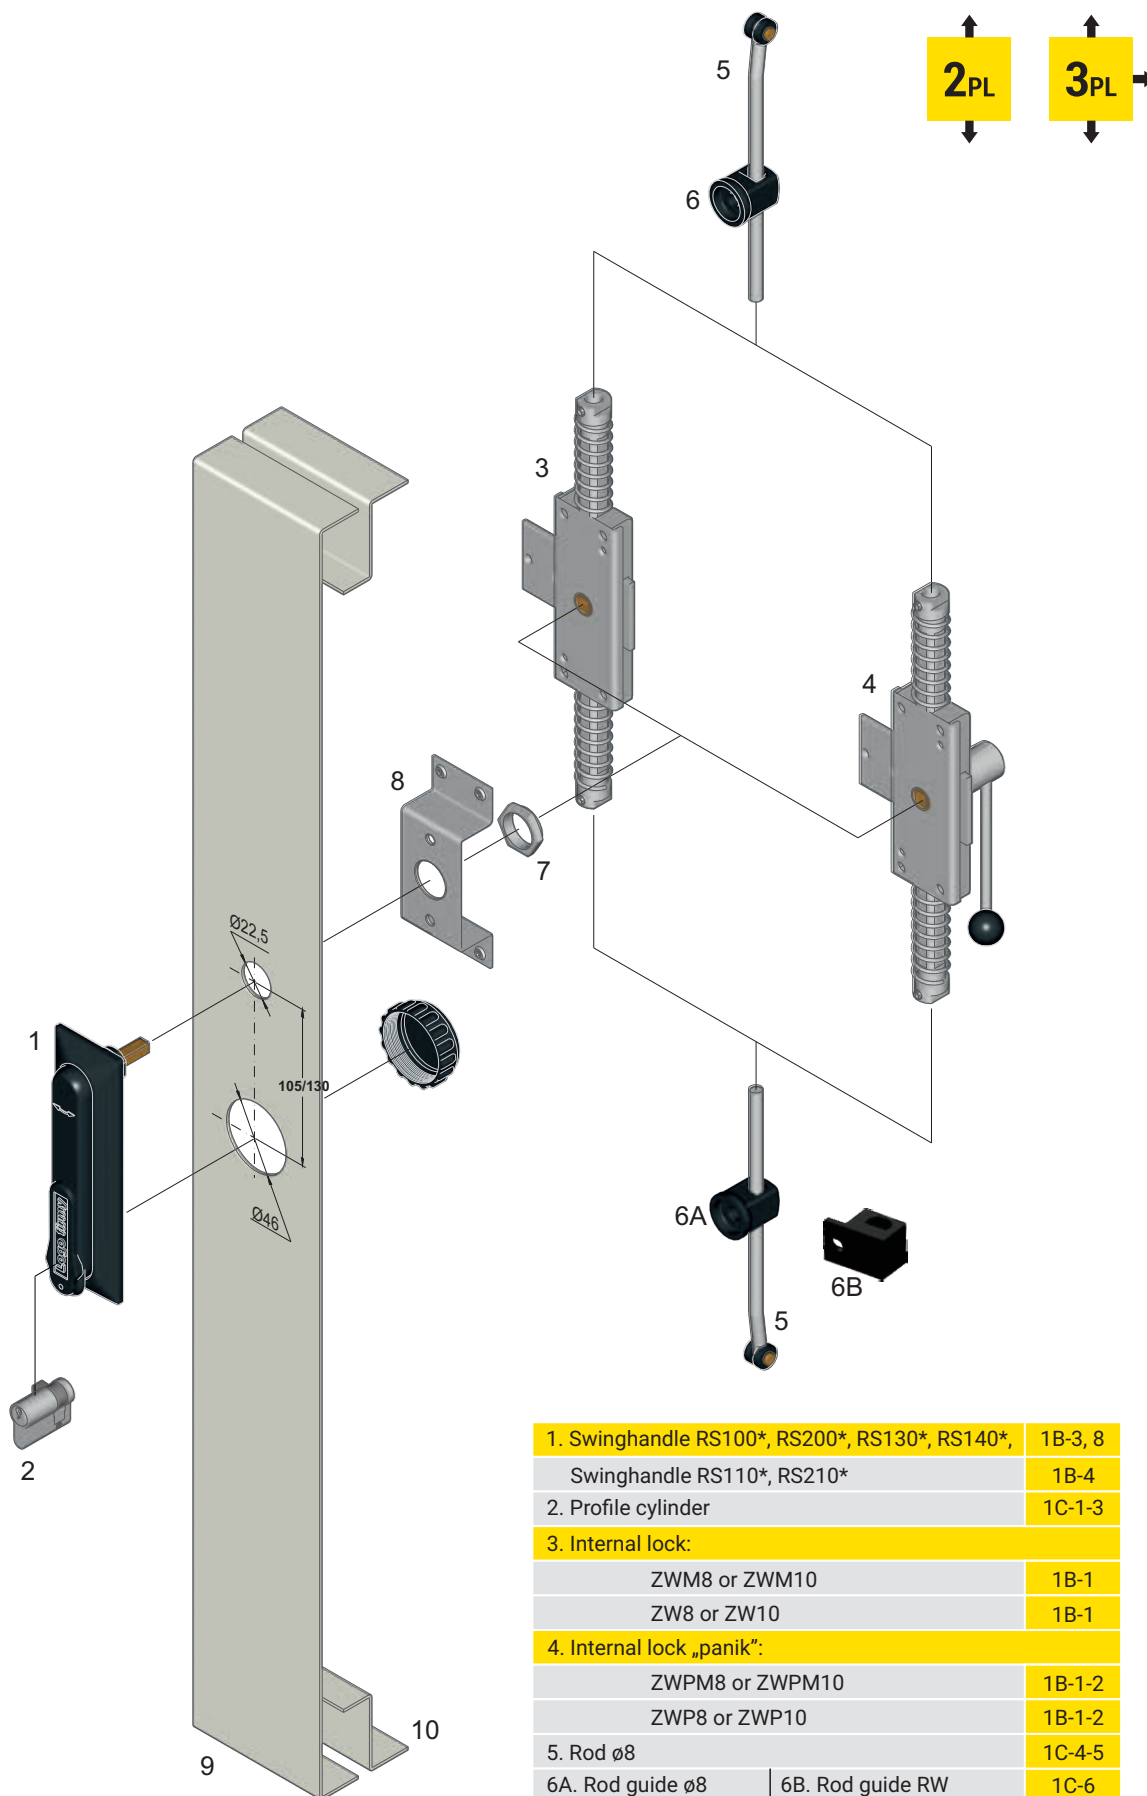

1. Swinghandle RS100*, RS200*, RS130*, RS140*, Swinghandle RS110*, RS210*	1B-3, 8 1B-4	
2. Profile cylinder	1C-1-3	
3. Internal lock:		
ZWM8 or ZWM10	1B-1	
ZW8 or ZW10	1B-1	
4. Internal lock „panik“:		
ZWPM8 or ZWPM10	1B-1-2	
ZWP8 or ZWP10	1B-1-2	
5. Rod ø8	1C-4-5	
6A. Rod guide ø8	6B. Rod guide RW	1C-6
7. Nut M22 x 1,5	-	
8. Lock support*	-	
9. Door of the box	-	
10. Edge of the box	-	

(*) When you order locks RS100, RS110, RS200, RS210, RS130, RS140 to **Internal lock**, you should add letters ZW e.e (RS100ZW, RS200ZW). When you order locks RS100, RS110, RS200, RS210 to **Internal lock panik**, you should add letters ZWP e.g. (RS100ZWP) **Lock support** only on special request.