


Fluid control valve(2/2way)

2S Series (Direct-acting and normally closed)



Symbol

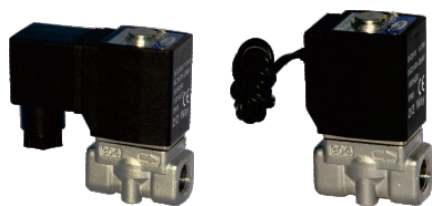


Product feature

1. Direct acting and normally closed type 2/2 way solenoid valve. Its high sensibility allows it to change direction quickly;
2. It has wide pressure range, including extra high pressure (X), high pressure (H), standard, large volume (L) and extra large volume (T) to choose from;
3. It is compact, small size and light weight. It is easy to install and dismantle.
4. The valve body is made of SUS304. Its coil has a Heat resistance classification of Class B. The standard seal material is FPM-F. Please contact us if other material are required.
5. The protection class of the coil is IP65 and there is a choice for grommet or terminal electrical entry.

Inner structure

2S030(Terminal)



No.	Item	No.	Item
1	Body	8	Coil assembly
2	Airtight ring	9	E Clip
3	Spring	10	Gasket
4	Fixed cap	11	Connector
5	O-ring	12	Washer
6	Fixed plate	13	Screw
7	Movable core		

Specification

Model\Item		Port size [Note1]	Orifice size (Φ mm)	Cv	Valid area or section (mm²)	Weight [Note2](g)	Max.operating pressure differential		Proof pressure	
							MPa	psi	MPa	psi
2SX030	-06	1/8"	1.5	0.10	1.8	300	3.0	450	5.0	750
	-08	1/4"				295				
2SH030	-06	1/8"	2.0	0.18	3.0	300	2.0	300		
	-08	1/4"				290				
2S030	-06	1/8"	3.0	0.33	6.0	300	1.0	150		
	-08	1/4"				290				
2SL030	-06	1/8"	4.0	0.55	10.0	300	0.5	75		
	-08	1/4"				290				
2ST030	-06	1/8"	6.0	1.10	12.0	300	0.1	15		
	-08	1/4"				290				
2SX050	-10	3/8"	3.0	0.34	6.1	600	3.0	450		
	-15	1/2"				590				
2SH050	-10	3/8"	4.0	0.55	10.0	600	2.0	300		
	-15	1/2"				590				
2S050	-10	3/8"	5.0	0.83	15.0	600	1.0	150		
	-15	1/2"				590				
2SL050	-10	3/8"	7.0	1.40	25.0	600	0.5	75		
	-15	1/2"				590				
2ST050	-10	3/8"	10.0	2.20	40.0	600	0.1	15		
	-15	1/2"				590				

[Note1] G thread is available.

[Note2] The weight in the table is the terminal valve's weight, 2S030 series grommet valve's weight is 10g less than terminal's. 2S050series grommet valve's weight is 20g less than terminal's.

Specification of coil

Valve type	Coil type	Power type	Frequency (Hz)	Voltage range	Electrical entry	Power Consumption (VA/W)	Insulation	Temp. rise(°C)
2S□030	CDA116 CLA116	AC	50	± 15%	Terminal (CDA)	10.0VA	Class B	35
			60			8.0VA		30
		DC	—	± 10%		6.5W		30
2S□050	CDA170 CLA170	AC	50	± 15%	Grommet (CLA)	25.0VA		60
			60			22.0VA		55
		DC	—	± 10%		10.5W		40

Valve's specification

Acting		Direct acting				
Initial state		Normally closed				
Adaptable fluid		Air, Water, Oil				
Viscosity limit		Under 20CST				
Ambient and fluid temperature (°C)			Water	Air	Oil	Ambient
		Max.	80	90	80	70
		Min.	1	-20 [Note1]	-10 [Note2]	-20

[Note1] Dew point: -20(°C) or less;

[Note2] 50CST or less.

Ordering code

Ordering code of valves

2S L 030 08 A □ G

① ② ③ ④ ⑤ ⑥ ⑦

① Model	② Pressure condition	③ Size series	④ Port size	⑤ Voltage	⑥ Electrical entry	⑦ Thread type
2S: 2/2 way direct-acting and normally closed	X: Extra high pressure H: High pressure Blank: Standard L: Large volume T: Extra large volume	030: 030 Series	06: 1/8" 08: 1/4"	A: AC220V B: DC24V C: AC110V E: AC24V F: DC12V	Blank: Terminal I: Grommet	G: G Thread
		050: 050 Series	10: 3/8" 15: 1/2"			

Ordering code of accessories

F-2S030 LB

① ② ③



① Accessories code	② Valve type	③ Accessories type
F: Mounting accessories	2S030: 030 Series valve 2S050: 050 Series valve	LB: LB Type



Fluid control valve(2/2way)


2S Series (Direct-acting and normally closed)

Flow chart

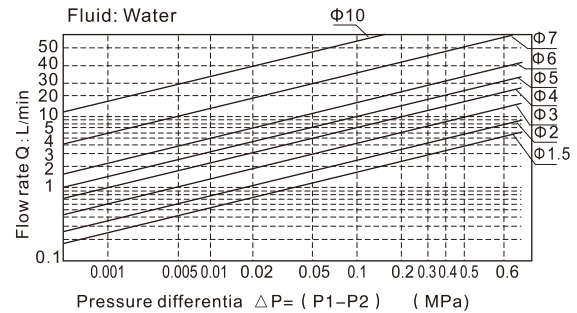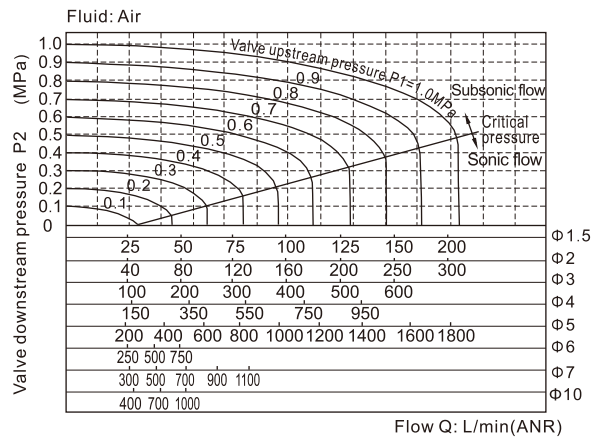


Dimensions


2S□030 (Terminal)

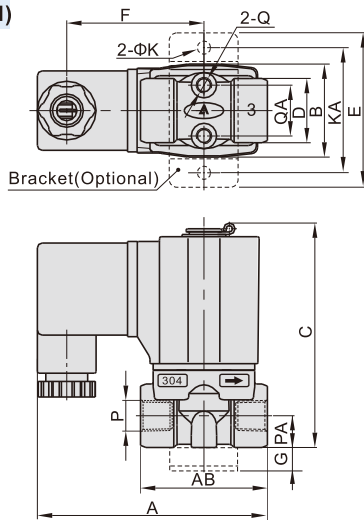


2S□030(Grommet)

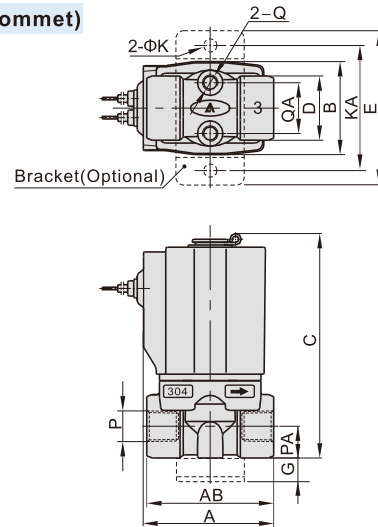

2S□050 (Terminal)

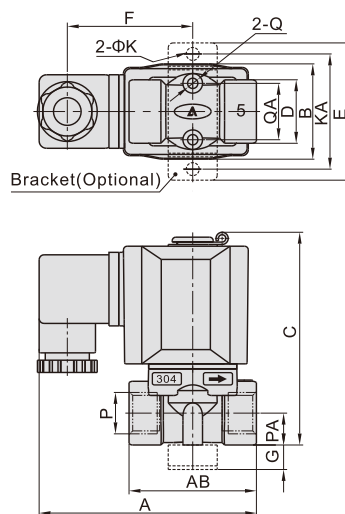

2S□050(Grommet)

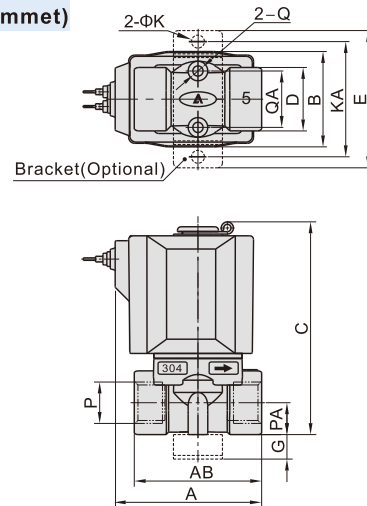


Model\Item	A	AB	B	C	D	E	F	G	K	KA	P	PA	Q	QA
2S□030-06	72.5	40	29.5	71	20	49	43.5	10	5.3	40	1/8"	10	M5	16
2S□030-08	72.5	40	29.5	71	20	49	43.5	10	5.3	40	1/4"	10	M5	16
2S□050-10	89.5	52	39	87	26	56	51	10	5.3	48	3/8"	13	M5	23
2S□050-15	89.5	52	39	87	26	56	51	10	5.3	48	1/2"	13	M5	23

Model\Item	A	AB	B	C	D	E	G	K	KA	P	PA	Q	QA
2S□030-06	41	40	29.5	71	20	49	10	5.3	40	1/8"	10	M5	16
2S□030-08	41	40	29.5	71	20	49	10	5.3	40	1/4"	10	M5	16
2S□050-10	60	52	39	87	26	56	10	5.3	48	3/8"	13	M5	23
2S□050-15	60	52	39	87	26	56	10	5.3	48	1/2"	13	M5	23

Fluid control valve(2/2way)

2S Series (Internally piloted and normally closed)

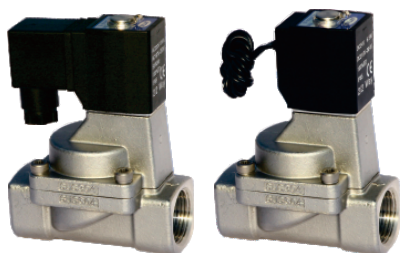


Symbol



Product feature

1. Indirect acting (Internal pilot) and normally closed type 2/2 way solenoid valve. Its can change direction quickly and has large flow.
2. It is compact, small and light weight. It is easy to install and dismantle;
3. The valve body is made of SUS304. The coil has a Heat resistance classification of Class B. The standard seal material is FPM-F. Please contact us if other material are required.
4. The protection class of the coil is IP65 and there is a choice for grommet or terminal electrical entry.

Inner structure

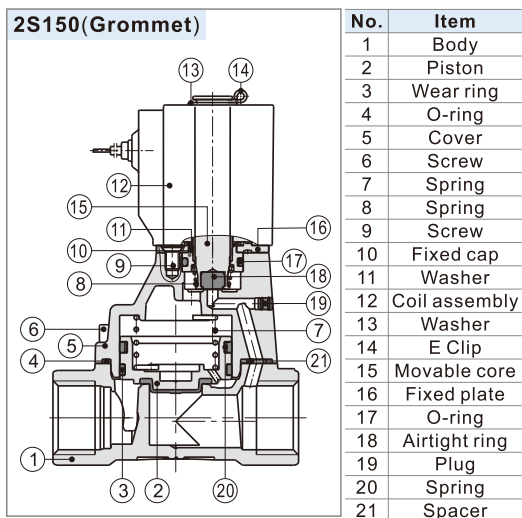

Ordering code

Ordering code of valves

2S 150 15 A □ G					
① Model	② Orifice size	③ Port size	④ Voltage	⑤ Electrical entry	⑥ Thread type
2S: 2/2 way internally piloted and normally closed	150: Φ15mm	15: 1/2"	A: AC220V B: DC24V C: AC110V E: AC24V F: DC12V	Blank: Terminal I: Grommet	G: G Thread
	200: Φ20mm	20: 3/4"			
	250: Φ25mm	25: 1"			
	320: Φ35mm	32: 1 1/4"			
	400: Φ40mm	40: 1 1/2"			
	500: Φ50mm	50: 2"			

Ordering code of accessories

F-2S150 LB		
① Accessories code	② Valve type	③ Accessories type
F: Mounting accessories	2S150: 150 Series valve 2S200: 200 Series valve 2S250: 250 Series valve	LB: LB Type

[[Note] 320\400\500 series valves do not have mounting accessories.

Specification

Model\Item	Port size [Note1]	Orifice size (Φmm)	Cv	Valid area or section (mm²)	Weight [Note2](g)	Operating pressure differential		Proof pressure	
						MPa	psi	MPa	psi
2S150-15	1/2"	15.0	5.50	100.0	675	Max: 1.0 Min: 0.05	Max: 150 Min: 10	1.5	220
2S200-20	3/4"	20.0	9.50	170.0	875				
2S250-25	1	25.0	12.50	220.0	1120				
2S320-32	1 1/4"	35.0	23.00	420.0	2700				
2S400-40	1 1/2"	40.0	31.00	560.0	3250				
2S500-50	2"	50.0	49.00	880.0	4300				

[Note1] G thread is available.

[Note2] The weight in the table is the terminal valve's weight, 2S150~250 series grommet valve's weight is 10g less than terminal's. 2S320~500 series grommet valve's weight is 20g less than terminal's.

Specification of coil

Valve type	Coil type	Power type	Frequency (Hz)	Voltage range	Electrical entry	Power Consumption (VA/W)	Insulation	Temp. rise(°C)
2S150 2S200 2S250	CDA116 CLA116	AC	50	± 15%	Terminal (CDA)	10.0VA	Class B	35
			60			8.0VA		30
		DC	—	± 10%		6.5W		30
2S320 2S400 2S500	CDA170 CLA170	AC	50	± 15%	Grommet (CLA)	25.0VA		60
			60			22.0VA		55
		DC	—	± 10%		10.5W		40

Valve's specification

Acting	Internally piloted				
Initial state	Normally closed				
Adaptable fluid	Air, Water, Oil				
Viscosity limit	Under 20CST				
Ambient and fluid temperature (°C)		Water	Air	Oil	Ambient
	Max.	80	90	80	70
	Min.	1	-20 [Note1]	-10 [Note2]	-20



[Note1] Dew point: -20(°C) or less;

[Note2] 50CST or less.

Fluid control valve(2/2way)


2S Series (Internally piloted and normally closed)

Flow chart

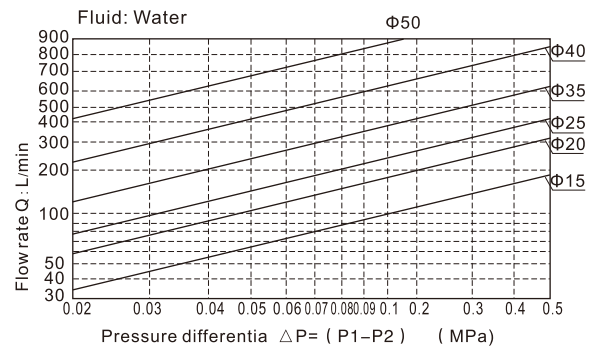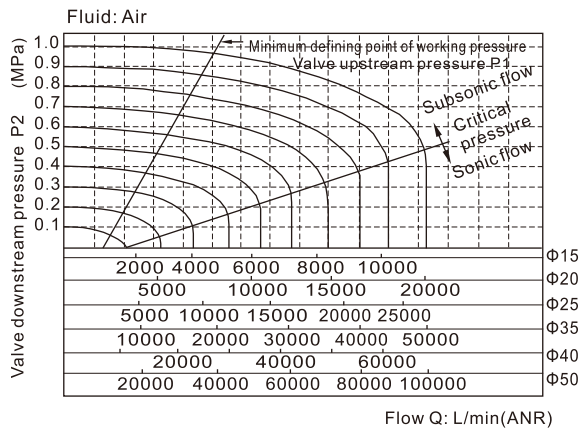


Dimensions


2S150~250 (Terminal)

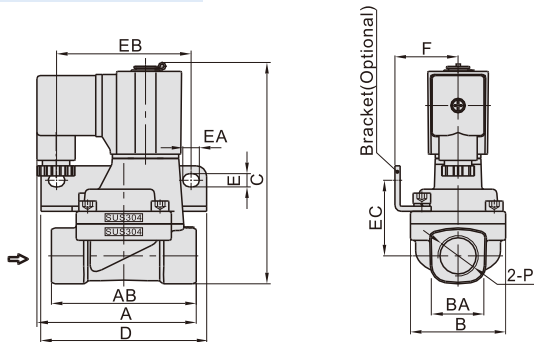


2S150~250(Grommet)

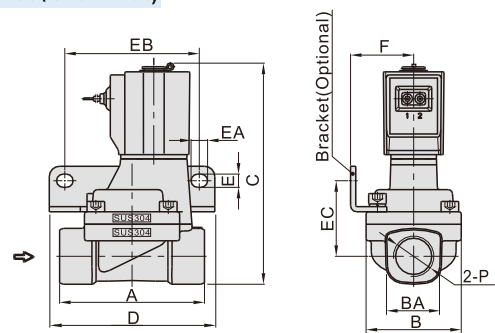

2S320~500 (Terminal)

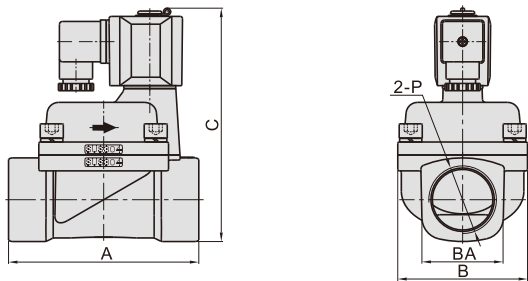

2S320~500(Grommet)

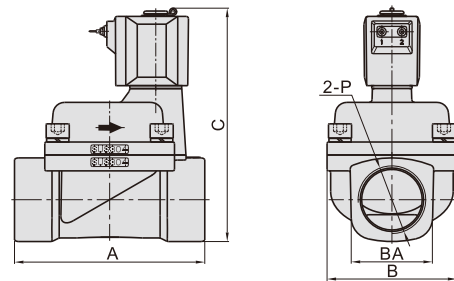


Model\Item	A	AB	B	BA	C	D	E	EA	EB	EC	F	P
2S150-15	77	70	46	27.5	107	80	6.4	8	65	36.5	30.5	1/2"
2S200-20	78.5	82	53	33.5	115.5	90	6.4	8	75	40	34	3/4"
2S250-25	81	92	59	40.5	124	95	6.4	8	80	44.5	36	1
2S320-32	125	-	80	52	154.5	-	-	-	-	-	-	1 1/4"
2S400-40	132	-	90	58	162	-	-	-	-	-	-	1 1/2"
2S500-50	150	-	100	70	177	-	-	-	-	-	-	2"

Model\Item	A	B	BA	C	D	E	EA	EB	EC	F	P
2S150-15	70	46	27.5	107	80	6.4	8	65	36.5	30.5	1/2"
2S200-20	82	53	33.5	115.5	90	6.4	8	75	40	34	3/4"
2S250-25	92	59	40.5	124	95	6.4	8	80	44.5	36	1
2S320-32	125	80	52	154.5	-	-	-	-	-	-	1 1/4"
2S400-40	132	90	58	162	-	-	-	-	-	-	1 1/2"
2S500-50	150	100	70	177	-	-	-	-	-	-	2"

Fluid control valve(2/2 way)

2KS Series (Direct-acting and normally opened)

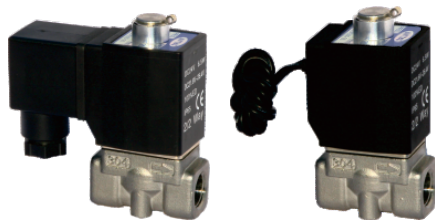

Symbol




Product feature

1. Direct acting and normally opened type 2/2 way solenoid valve. Its high sensibility allows it to change direction quickly;
2. It has wide pressure range, including extra high pressure (X), high pressure (H), standard and large volume(L) to choose from;
3. It is compact, small size and light weight. It is easy to install and dismantle.
4. The valve body is made of SUS304 . Its coil has a Heat resistance classification of Class B. The standard seal material is FPM-F. Please contact us if other material are required.
5. The protection class of the coil is IP65 and there is a choice for grommet or terminal electrical entry .

Inner structure

2KS030(Terminal)



No.	Item	No.	Item
1	Body	10	Coil assembly
2	Airtight ring	11	Position ring
3	Spring	12	E Clip
4	Bead flange	13	Connector
5	Fixed plate	14	Washer
6	O-ring	15	Screw
7	Fixed cap	16	Spring
8	Electromagnet	17	Airtight bush
9	Man drill		

Specification

Model\Item		Port size [Note1]	Orifice size (Φmm)	Cv	Valid area or section (mm ²)	Weight [Note2](g)	Max.operating pressure differential		Proof pressure	
							MPa	psi	MPa	psi
2KSX030	-06	1/8"	1.5	0.10	1.8	305	2.0	300	3.0	450
	-08	1/4"				295				
2KSH030	-06	1/8"	2.0	0.18	3.0	305	1.5	220		
	-08	1/4"				295				
2KS030	-06	1/8"	3.0	0.33	6.0	305	0.7	100		
	-08	1/4"				295				
2KSL030	-06	1/8"	4.0	0.55	10.0	305	0.4	60		
	-08	1/4"				295				
2KSX050	-10	3/8"	3.0	0.34	6.1	610	2.0	300		
	-15	1/2"				600				
2KSH050	-10	3/8"	4.0	0.55	10.0	610	1.5	220		
	-15	1/2"				600				
2KS050	-10	3/8"	5.0	0.83	15.0	610	0.7	100		
	-15	1/2"				600				
2KSL050	-10	3/8"	7.0	1.40	25.0	610	0.4	60		
	-15	1/2"				600				

[Note1] G thread is available.

[Note2] The weight in the table is the terminal valve's weight, 2KS030 series grommet valve's weight is 10g less than terminal's. 2KS050series grommet valve's weight is 20g less than terminal's.

Specification of coil

Valve type	Coil type	Power type	Frequency (Hz)	Voltage range	Electrical entry	Power Consumption (VA/W)	Insulation	Temp. rise(°C)	
2KS□030	CDA116 CLA116	AC	50	± 15%	Terminal (CDA)	15.0VA	Class B	50	
			60			11.0VA		40	
		DC	—	± 10%		6.5W		30	
2KS□050	CDA170 CLA170	AC	50	± 15%	Grommet (CLA)	35.0VA		65	
			60			30.0VA		60	
			± 15%						
		DC						—	± 10%

Valve's specification

Acting	Direct acting				
Initial state	Normally opened				
Adaptable fluid	Air, Water, Oil				
Viscosity limit	Under 20CST				
Ambient and fluid temperature (°C)	Max.	Water 80	Air 90	Oil 80	Ambient 70
	Min.	1	-20 [Note1]	-10 [Note2]	-20

[Note1] Dew point: -20(°C) or less;

[Note2] 50CST or less.

Ordering code

Ordering code of valves

2KS H 030 08 A □ G



①Model	②Pressure condition	③Size series	④Port size	⑤Voltage	⑥Electrical entry	⑦Thread type
2KS: 2/2 way direct-acting and normally opened	X: Extra high pressure H: High pressure Blank: Standard L: Large volume	030: 030 Series 050: 050 Series	06: 1/8" 08: 1/4" 10: 3/8" 15: 1/2"	A: AC220V B: DC24V C: AC110V E: AC24V F: DC12V	Blank: Terminal I: Grommet	G: G Thread

Ordering code of accessories



Ordering code of accessories is the same as 2S series valve's, Please refer to P155 for details of ordering code.



Fluid control valve(2/2 way)


2KS Series (Direct-acting and normally opened)

Flow chart

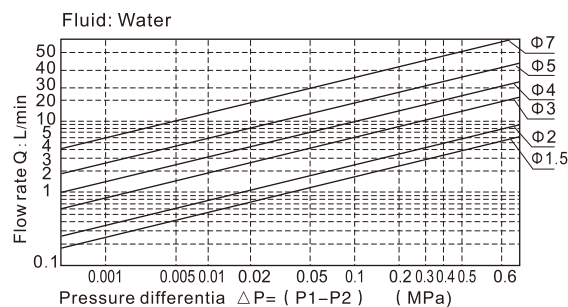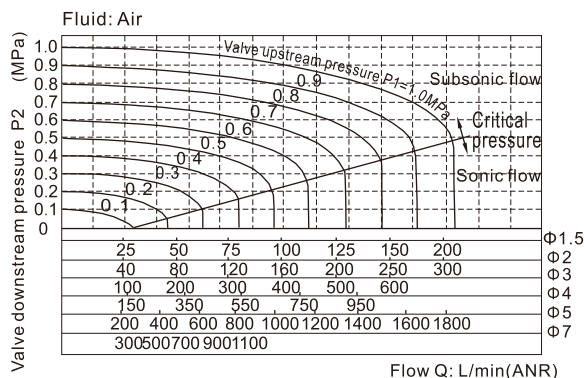


Dimensions


2KS□030 (Terminal)

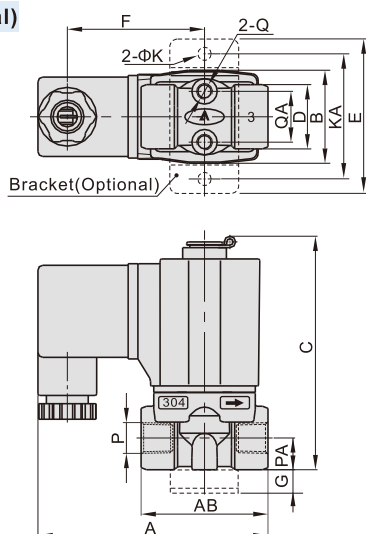


2KS□030(Grommet)

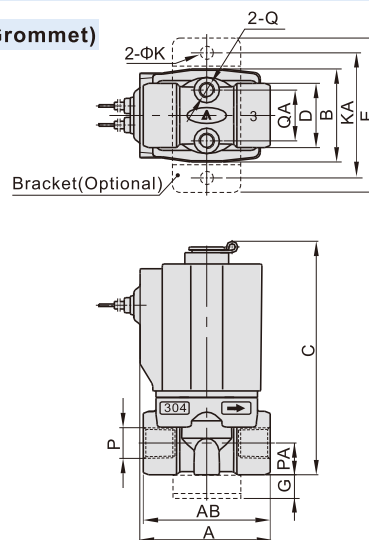

2KS□050 (Terminal)

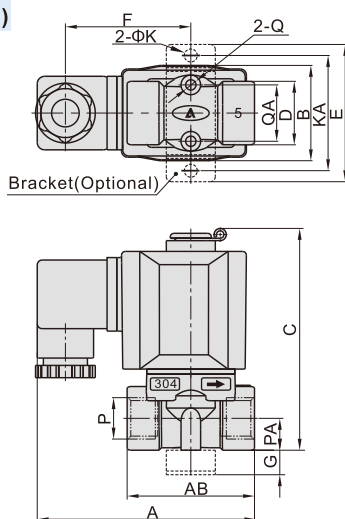

2KS□050(Grommet)

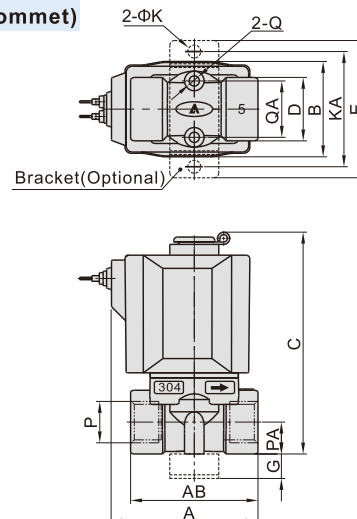


Model\Item	A	AB	B	C	D	E	F	G	K	KA	P	PA	Q	QA
2KS□030-06	72.5	40	29.5	76	20	49	43.5	10	5.3	40	1/8"	10	M5	16
2KS□030-08	72.5	40	29.5	76	20	49	43.5	10	5.3	40	1/4"	10	M5	16
2KS□050-10	89.5	52	39	92	26	56	51	10	5.3	48	3/8"	13	M5	23
2KS□050-15	89.5	52	39	92	26	56	51	10	5.3	48	1/2"	13	M5	23

Model\Item	A	AB	B	C	D	E	G	K	KA	P	PA	Q	QA
2KS□030-06	41	40	29.5	76	20	49	10	5.3	40	1/8"	10	M5	16
2KS□030-08	41	40	29.5	76	20	49	10	5.3	40	1/4"	10	M5	16
2KS□050-10	60	52	39	92	26	56	10	5.3	48	3/8"	13	M5	23
2KS□050-15	60	52	39	92	26	56	10	5.3	48	1/2"	13	M5	23

Fluid control valve(2/2 way)

2KS Series (Internally piloted and normally opened)

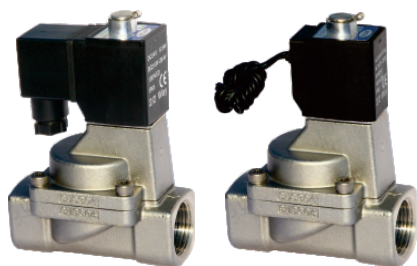

Symbol




Product feature

1. Indirect acting (Internal pilot) and normally opened type 2/2 way solenoid valve. Its can change direction quickly and has large flow.
2. It is compact, small and light weight. It is easy to install and dismantle;
3. The valve body is made of SUS304 . The coil has a Heat resistance classification of Class B. The standard seal material is FPM-F. Please contact us if other material are required.
4. The protection class of the coil is IP65 and there is a choice for grommet or terminal electrical entry .

Inner structure

2KS150(Grommet)

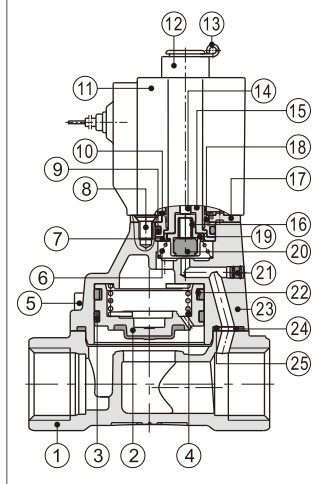

No.	Item
1	Body
2	Piston
3	Wear ring
4	Spring
5	Screw
6	Spring
7	Fixed ring
8	Screw
9	O-ring
10	Washer
11	Coil assembly
12	Position ring
13	E Clip
14	Man drill
15	Movable core
16	Spring
17	Fixed plate
18	Fixed cap
19	Airtight bushing
20	Airtight ring
21	Plug
22	Spring
23	Cover
24	Bushing
25	O-ring

Ordering code

Ordering code of valves

2KS 150 15 A □ G

1 2 3 4 5 6

①Model	②Orifice size	③Port size	④Voltage	⑤Electrical entry	⑥Thread type
2KS: 2/2 way internally piloted and normally opened	150: Φ15mm	15: 1/2"	A: AC220V B: DC24V C: AC110V E: AC24V F: DC12V	Blank: Terminal I: Grommet	G: G Thread
	200: Φ20mm	20: 3/4"			
	250: Φ25mm	25: 1"			
	320: Φ35mm	32: 1 1/4"			
	400: Φ40mm	40: 1 1/2"			
	500: Φ50mm	50: 2"			

Specification

Model\Item	Port size [Note1]	Orifice size (Φmm)	Cv	Valid area or section (mm ²)	Weight [Note2](g)	Operating pressure differential		Proof pressure	
						MPa	psi	MPa	psi
2KS150-15	1/2"	15.0	5.50	100.0	680	Max: 0.7 Min: 0.05	Max: 100 Min: 10	1.5	220
2KS200-20	3/4"	20.0	9.50	170.0	880				
2KS250-25	1	25.0	12.50	220.0	1125				
2KS320-32	1 1/4"	35.0	23.00	420.0	2710				
2KS400-40	1 1/2"	40.0	31.00	560.0	3260				
2KS500-50	2"	50.0	49.00	880.0	4310				

[Note1] G thread is available.

[Note2] The weight in the table is the terminal valve's weight, 2KS150~250 series grommet valve's weight is 10g less than terminal's. 2KS320~500 series grommet valve's weight is 20g less than terminal's.

Specification of coil

Valve type	Coil type	Power type	Frequency (Hz)	Voltage range	Electrical entry	Power Consumption (VA/W)	Insulation	Temp. rise(°C)
2KS150 2KS200 2KS250	CDA116 CLA116	AC	50	± 15 %	Terminal (CDA)	15.0VA	Class B	50
			60			11.0VA		40
		DC	—	± 10 %		6.5W		30
2KS320 2KS400 2KS500	CDA170 CLA170	AC	50	± 15 %	Grommet (CLA)	35.0VA		65
			60			30.0VA		60
		DC	—	± 10 %		10.5W		40

Valve's specification

Acting		Internally piloted				
Initial state		Normally opened				
Adaptable fluid		Air, Water, Oil				
Viscosity limit		Under 20CST				
Ambient and fluid temperature (°C)		Water	Air	Oil	Ambient	
	Max.	80	90	80	70	
	Min.	1	-20 [Note1]	-10 [Note2]	-20	

[Note1] Dew point: -20(°C) or less;

[Note2] 50CST or less.

Ordering code of accessories

Ordering code of accessories is the same as 2S series valve's, please refer to P157 for details of ordering code.



[Note] 320\400\500 series valves do not have mounting accessories.



Fluid control valve(2/2 way)


2KS Series (Internally piloted and normally opened)

Flow chart

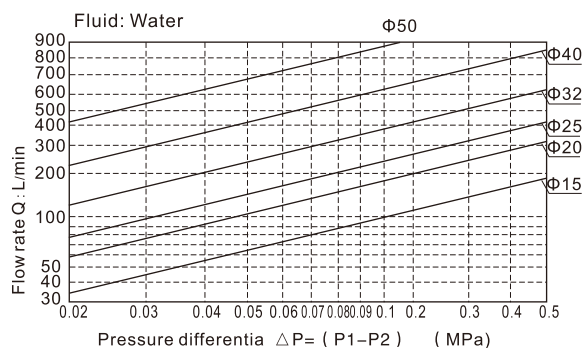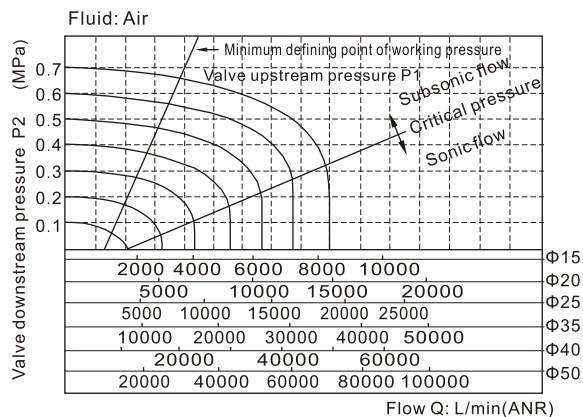


Dimensions


2KS150~250 (Terminal)

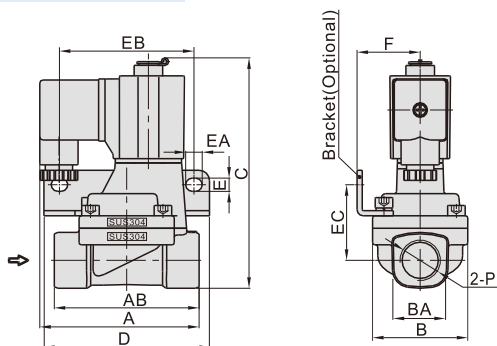


2KS150~250(Grommet)

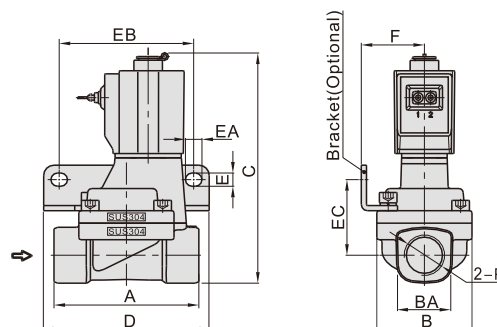

2KS320~500 (Terminal)

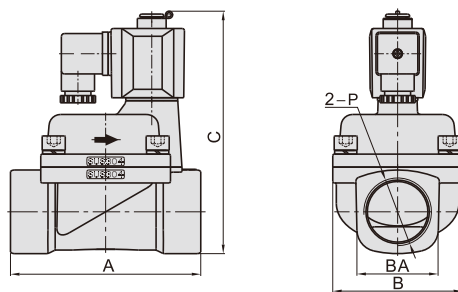

2KS320~500(Grommet)

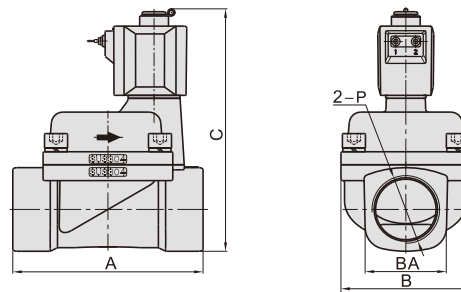


Model\Item	A	AB	B	BA	C	D	E	EA	EB	EC	F	P
2KS150-15	77	70	46	27.5	112.5	80	6.4	8	65	36.5	30.5	1/2"
2KS200-20	78.5	82	53	33.5	121	90	6.4	8	75	40	34	3/4"
2KS250-25	81	92	59	40.5	129.5	95	6.4	8	80	44.5	36	1
2KS320-32	125	-	80	52	160	-	-	-	-	-	-	1 1/4"
2KS400-40	132	-	90	58	167	-	-	-	-	-	-	1 1/2"
2KS500-50	150	-	100	70	182	-	-	-	-	-	-	2"

Model\Item	A	B	BA	C	D	E	EA	EB	EC	F	P
2KS150-15	70	46	27.5	112.5	80	6.4	8	65	36.5	30.5	1/2"
2KS200-20	82	53	33.5	121	90	6.4	8	75	40	34	3/4"
2KS250-25	92	59	40.5	129.5	95	6.4	8	80	44.5	36	1
2KS320-32	125	80	52	160	-	-	-	-	-	-	1 1/4"
2KS400-40	132	90	58	167	-	-	-	-	-	-	1 1/2"
2KS500-50	150	100	70	182	-	-	-	-	-	-	2"

Fluid control valve(2/2 way)

2L Series (Direct-acting and normally closed)

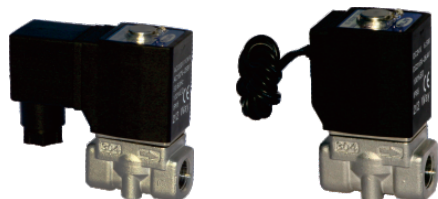

Symbol



Product feature

1. Direct acting and normally closed type 2/2 way solenoid valve. Its high sensibility allows it to change direction quickly;
2. It has wide pressure range, including standard high pressure (H) to choose from;
3. It is compact, small size and light weight. It is easy to install and dismantle.
4. The valve body is made of SUS304 . Its coil has a Heat resistance classification of Class H. The standard seal material is PTFE(Teflon) which is suitable for a variety of working medium such as water with high temperature and vapour.
5. The protection class of the coil is IP65 and there is a choice for grommet or terminal electrical entry .

Specification

Model\Item		Port size [Note1]	Orifice size (Φ mm)	Cv	Valid area or section (mm ²)	Weight [Note2](g)	Max.operating pressure differentia		Proof pressure	
							MPa	psi	MPa	psi
2LH030	-06	1/8"	2.0	0.18	3.0	300	2.0	300	3.0	450
	-08	1/4"				290				
2LO30	-06	1/8"	3.0	0.33	6.0	300	1.0	150		
	-08	1/4"				290				
2LH050	-10	3/8"	4.0	0.55	10.0	600	2.0	300		
	-15	1/2"				590				
2LO50	-10	3/8"	5.0	0.83	15.0	600	1.0	150		
	-15	1/2"				590				

[Note1] G thread is available.


[Note2] The weight in the table is the terminal valve's weight, 2LO30 series grommet valve's weight is 10g less than terminal's. 2LO50series grommet valve's weight is 20g less than terminal's.

Specification of coil

Valve type	Coil type	Power type	Frequency (Hz)	Voltage range	Electrical entry	Power Consumption (VA/W)	Insulation	Temp. rise(°C)
2L□030	CDA116 CLA116	AC	50	± 15%	Terminal (CDA)	10.0VA	Class H	35
			60			8.0VA		30
		DC	—	± 10%		6.5W		30
2L□050	CDA170 CLA170	AC	50	± 15%	Grommet (CLA)	25.0VA		60
			60			22.0VA		55
		DC	—	± 10%		10.5W		40

Inner structure

2L030 (Terminal)



No.	Item	No.	Item	No.	Item
1	Body	6	Fixed cap	11	E Clip
2	Airtight ring	7	Fixed plate	12	Connector
3	Spring	8	Movable core	13	Bead flange
4	Spring	9	Coil assembly	14	Screw
5	O-ring	10	Washer		

Valve's specification

Acting		Direct acting			
Initial state		Normally closed			
Adaptable fluid		Steam, High temperature Water, Oil			
Viscosity limit		Under 20CST			
Ambient and fluid temperature (°C)			Oil	Water	Steam
		Max.	150	150	183
		Min.	-10 [Note1]	1	—
					Ambient
					100
					-20

[Note1] 50CST or less.

Ordering code

Ordering code of valves

2L H 030 08 A □ G

① ② ③ ④ ⑤ ⑥ ⑦

① Model	② Pressure condition	③ Size series	④ Port size	⑤ Voltage	⑥ Electrical entry	⑦ Thread type
2L: 2/2 way direct-acting and normally closed	H: High pressure Blank: Standard	030: 030 Series	06: 1/8" 08: 1/4"	A: AC220V B: DC24V C: AC110V E: AC24V F: DC12V	Blank: Terminal I: Grommet	G: G Thread
		050: 050 Series	10: 3/8" 15: 1/2"			



Ordering code of accessories

Ordering code of accessories is the same as 2S series valve's, Please refer to P155 for details of ordering code.

Fluid control valve(2/2 way)


2L Series (Direct-acting and normally closed)

Flow chart

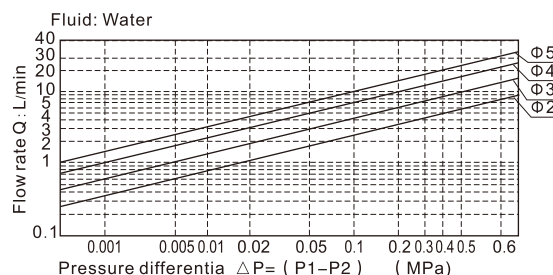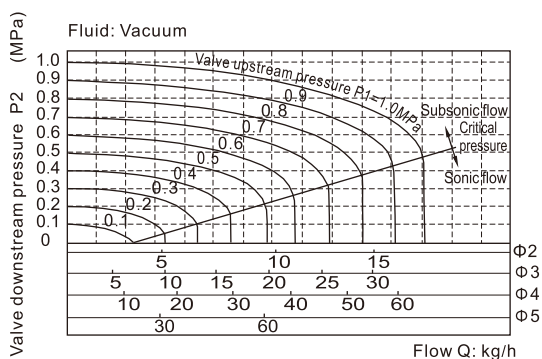


Dimensions


2L□030(Terminal)

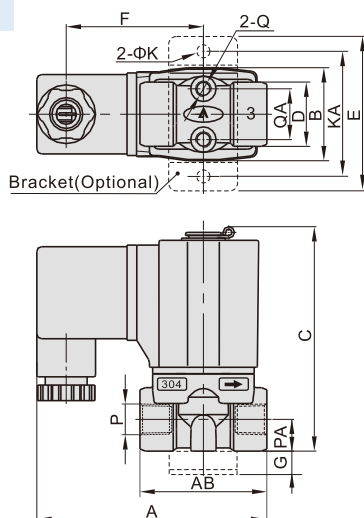


2L□030(Grommet)

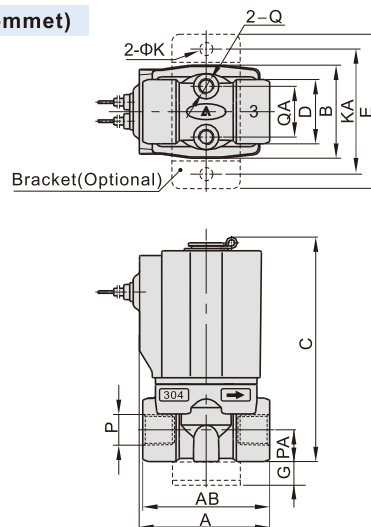

2L□050(Terminal)

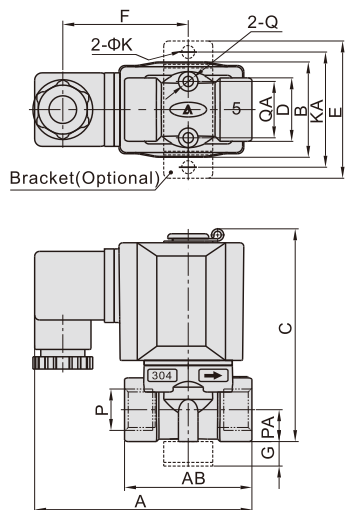

2L□050(Grommet)

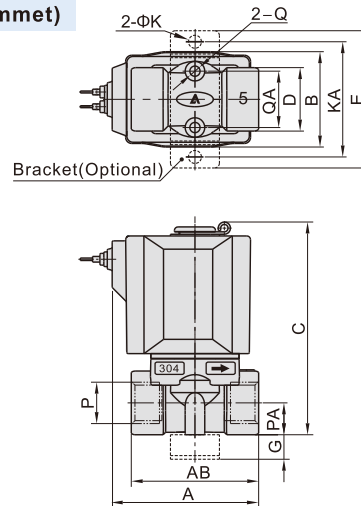


Model\Item	A	AB	B	C	D	E	F	G	K	KA	P	PA	Q	QA
2L□030-06	72.5	40	29.5	71	20	49	43.5	10	5.3	40	1/8"	10	M5	16
2L□030-08	72.5	40	29.5	71	20	49	43.5	10	5.3	40	1/4"	10	M5	16
2L□050-10	89.5	52	39	87	26	56	51	10	5.3	48	3/8"	13	M5	23
2L□050-15	89.5	52	39	87	26	56	51	10	5.3	48	1/2"	13	M5	23

Model\Item	A	AB	B	C	D	E	G	K	KA	P	PA	Q	QA
2L□030-06	41	40	29.5	71	20	49	10	5.3	40	1/8"	10	M5	16
2L□030-08	41	40	29.5	71	20	49	10	5.3	40	1/4"	10	M5	16
2L□050-10	60	52	39	87	26	56	10	5.3	48	3/8"	13	M5	23
2L□050-15	60	52	39	87	26	56	10	5.3	48	1/2"	13	M5	23

Fluid control valve(2/2 way)

2L Series (Internally piloted and normally closed)

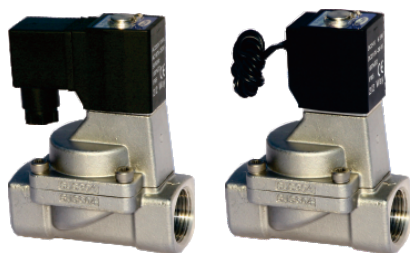

Symbol




Product feature

1. Indirect acting (Internal pilot) and normally closed type 2/2 way solenoid valve. Its high sensibility allows it to change direction quickly.
2. It is compact, small size and light weight. It is easy to install and dismantle.
3. The valve body is made of SUS304. Its coil has a Heat resistance classification of Class H. The standard seal material is PTFE (Teflon) which is suitable for a variety of working medium such as water with high temperature and vapour.
4. The protection class of the coil is IP65 and there is a choice for grommet or terminal electrical entry.

Inner structure

2L150 (Grommet)

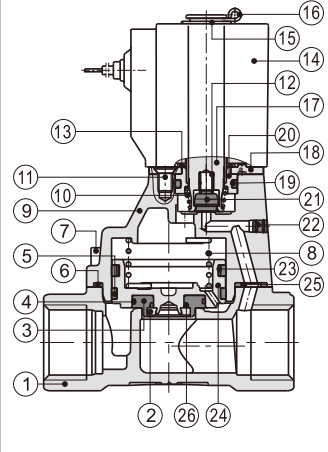

No.	Item
1	Body
2	Fixed ring
3	Airtight bush
4	O-ring
5	Wear ring
6	Gasket
7	Screw
8	Spring
9	Cover
10	Spring
11	Screw
12	Spring
13	Bead flange
14	Coil assembly
15	Washer
16	E Clip
17	Movable core
18	Fixed plate
19	O-ring
20	Fixed cap
21	Airtight ring
22	Plug
23	Spring
24	Piston
25	Bushing
26	O-ring

Ordering code

Ordering code of valves

2L 150 15 A □ G

① ② ③ ④ ⑤ ⑥

① Model	② Orifice size	③ Port size	④ Voltage	⑤ Electrical entry	⑥ Thread type
2L: 2/2 way internally piloted and normally closed	150: Φ15mm	15: 1/2"	A: AC220V B: DC24V C: AC110V E: AC24V F: DC12V	Blank: Terminal I: Grommet	G: G Thread
	200: Φ20mm	20: 3/4"			
	250: Φ25mm	25: 1"			
	320: Φ35mm	32: 1 1/4"			
	400: Φ40mm	40: 1 1/2"			
	500: Φ50mm	50: 2"			

Ordering code of accessories

Ordering code of accessories is the same as 2S series valve's, please refer to P157 for details of ordering code.

[Note] 320/400/500 series valves do not have mounting accessories.

Specification

Model\Item	Port size [Note1]	Orifice size (Φmm)	Cv	Valid area or section (mm ²)	Weight [Note2](g)	Operating pressure differential		Proof pressure	
						MPa	psi	MPa	psi
2L150-15	1/2"	15.0	5.50	100.0	675	Max: 1.0 Min: 0.05	Max: 150 Min: 10	1.5	220
2L200-20	3/4"	20.0	9.50	170.0	875				
2L250-25	1"	25.0	12.50	220.0	1120				
2L320-32	1 1/4"	35.0	23.00	420.0	2700				
2L400-40	1 1/2"	40.0	31.00	560.0	3250				
2L500-50	2"	50.0	49.00	880.0	4300				

[Note1] G thread is available.

[Note2] The weight in the table is the terminal valve's weight, 2L150~250series grommet valve's weight is 10g less than terminal's. 2L320~500series grommet valve's weight is 20g less than terminal's.

Specification of coil

Valve type	Coil type	Power type	Frequency (Hz)	Voltage range	Electrical entry	Power Consumption (VA/W)	Insulation	Temp. rise(℃)
2L150	CDA116 CLA116	AC	50	± 15 %	Terminal (CDA)	10.0VA	Class H	35
2L200			60			8.0VA		30
2L250		—	± 10 %	6.5W		30		
2L320	CDA170 CLA170	AC	50	± 15 %	Grommet (CLA)	25.0VA		60
2L400			60			22.0VA		55
2L500		DC	—	± 10 %		10.5W		40

Valve's specification



Acting	Internally piloted				
Initial state	Normally closed				
Adaptable fluid	Steam, High temperature Water, Oil				
Viscosity limit	Under 20cSt				
Ambient and fluid temperature (°C)		Oil	Water	Steam	Ambient
	Max.	150	150	183	100
	Min.	-10 [Note1]	1	—	-20

[Note1] 50cSt or less.

Fluid control valve(2/2 way)


2L Series (Internally piloted and normally closed)

Flow chart

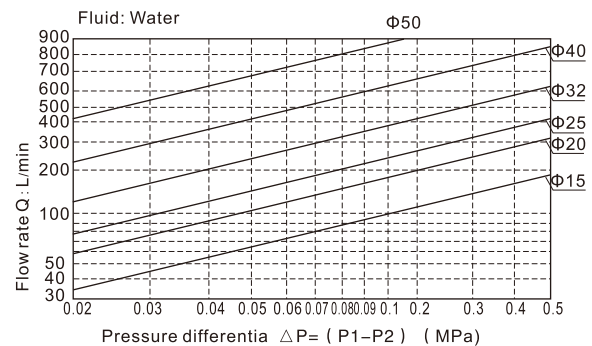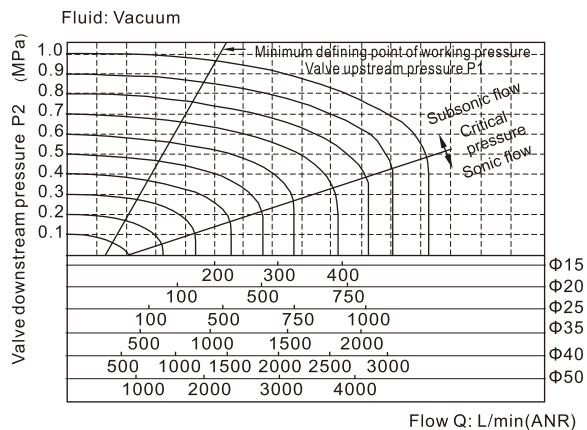


Dimensions


2L150~250(Terminal)

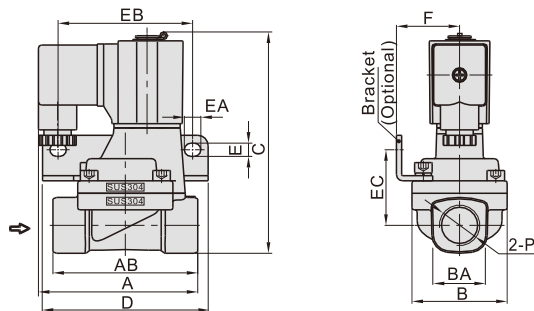


2L150~250(Grommet)

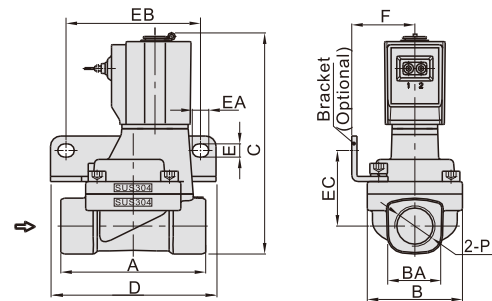

2L320~500(Terminal)

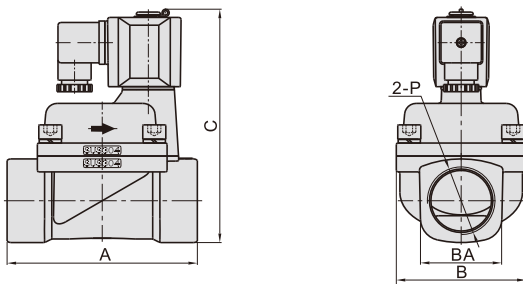

2L320~500(Grommet)

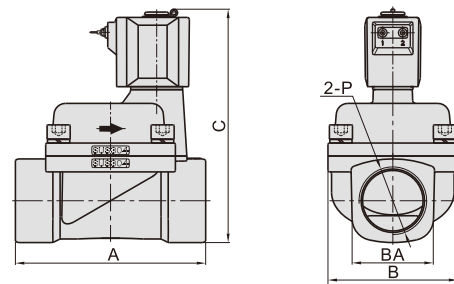


Model\Item	A	AB	B	BA	C	D	E	EA	EB	EC	F	P
2L150-15	77	70	46	27.5	107	80	6.4	8	65	36.5	30.5	1/2"
2L200-20	78.5	82	53	33.5	115.5	90	6.4	8	75	40	34	3/4"
2L250-25	81	92	59	40.5	124	95	6.4	8	80	44.5	36	1"
2L320-32	125	-	80	52	154.5	-	-	-	-	-	-	1 1/4"
2L400-40	132	-	90	58	162	-	-	-	-	-	-	1 1/2"
2L500-50	150	-	100	70	177	-	-	-	-	-	-	2"

Model\Item	A	B	BA	C	D	E	EA	EB	EC	F	P
2L150-15	70	46	27.5	107	80	6.4	8	65	36.5	30.5	1/2"
2L200-20	82	53	33.5	115.5	90	6.4	8	75	40	34	3/4"
2L250-25	92	59	40.5	124	95	6.4	8	80	44.5	36	1"
2L320-32	125	80	52	154.5	-	-	-	-	-	-	1 1/4"
2L400-40	132	90	58	162	-	-	-	-	-	-	1 1/2"
2L500-50	150	100	70	177	-	-	-	-	-	-	2"

Fluid control valve(2/2 way)

2KL Series (Direct-acting and normally opened)

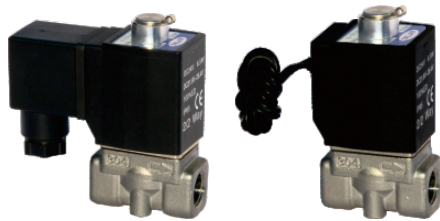

Symbol



Product feature

1. Direct acting and normally opened type 2/2 way solenoid valve. Its high sensibility allows it to change direction quickly;
2. It has wide pressure range, including standard high pressure (H) to choose from;
3. It is compact, small size and light weight. It is easy to install and dismantle.
4. The valve body is made of SUS304 . Its coil has a Heat resistance classification of Class H. The standard seal material is PTFE(Teflon) which is suitable for a variety of working medium such as water with high temperature and vapour.
5. The protection class of the coil is IP65 and there is a choice for grommet or terminal electrical entry .

Specification

Model\Item		Port size [Note1]	Orifice size (Φmm)	Cv	Valid area or section (mm ²)	Weight [Note2](g)	Max.operating pressure differentia		Proof pressure	
							MPa	psi	MPa	psi
2KLH030	-06	1/8"	2.0	0.18	3.0	305	1.5	220	3.0	450
	-08	1/4"				295				
2KL030	-06	1/8"	3.0	0.33	6.0	305	0.7	100		
	-08	1/4"				295				
2KLH050	-10	3/8"	4.0	0.55	10.0	610	1.5	220		
	-15	1/2"				600				
2KL050	-10	3/8"	5.0	0.83	15.0	610	0.7	100		
	-15	1/2"				600				

[Note1] G thread is available.


[Note2] The weight in the table is the terminal valve's weight, 2KL030 series grommet valve's weight is 10g less than terminal's. 2KL050series grommet valve's weight is 20g less than terminal's.

Specification of coil

Valve type	Coil type	Power type	Frequency (Hz)	Voltage range	Electrical entry	Power Consumption (VA/W)	Insulation	Temp. rise(℃)
2KL□030	CDA116 CLA116	AC	50	± 15 %	Terminal (CDA)	15.0VA	Class H	50
			60			11.0VA		40
		DC	—	± 10 %		6.5W		30
2KL□050	CDA170 CLA170	AC	50	± 15 %	Grommet (CLA)	35.0VA		65
			60			30.0VA		60
		DC	—	± 10 %		10.5W		40

Inner structure

2KL030 (Terminal)

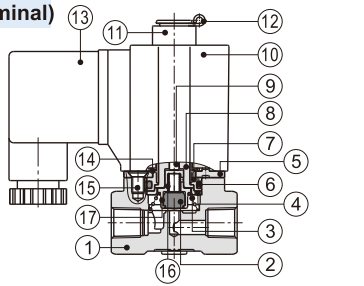

No.	Item	No.	Item	No.	Item
1	Body	7	Fixed cap	13	Connector
2	Airtight ring	8	Electromagnet	14	Spring washer
3	Spring	9	Man drill	15	Screw
4	Fixed ring	10	Coil assembly	16	Spring
5	Fixed plate	11	Position ring	17	Airtight bush
6	O-ring	12	E Clip		

Valve's specification

Acting		Direct acting			
Initial state		Normally opened			
Adaptable fluid		Steam, High temperature Water, Oil			
Viscosity limit		Under 20CST			
Ambient and fluid temperature (°C)			Oil	Water	Steam
		Max.	150	150	183
		Min.	-10 [Note1]	1	—
					Ambient
					100
					-20

[Note1] 50CST or less.

Ordering code

Ordering code of valves

2KL H 030 08 A □ G

① ② ③ ④ ⑤ ⑥ ⑦

① Model	② Pressure condition	③ Size series	④ Port size	⑤ Voltage	⑥ Electrical entry	⑦ Thread type
2KL: 2/2 way direct-acting and normally opened	H: High pressure Blank: Standard	030: 030 Series	06: 1/8" 08: 1/4"	A: AC220V B: DC24V C: AC110V E: AC24V F: DC12V	Blank: Terminal I: Grommet	G: G Thread
		050: 050 Series	10: 3/8" 15: 1/2"			



Ordering code of accessories

Ordering code of accessories is the same as 2S series valve's, Please refer to P155 for details of ordering code.

Fluid control valve(2/2 way)


2KL Series (Direct-acting and normally opened)

Flow chart

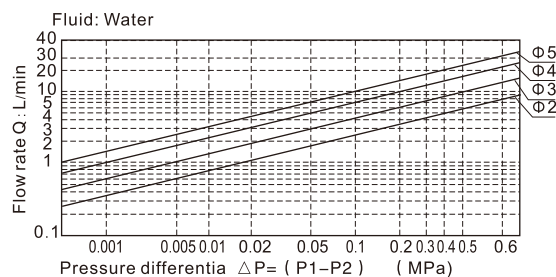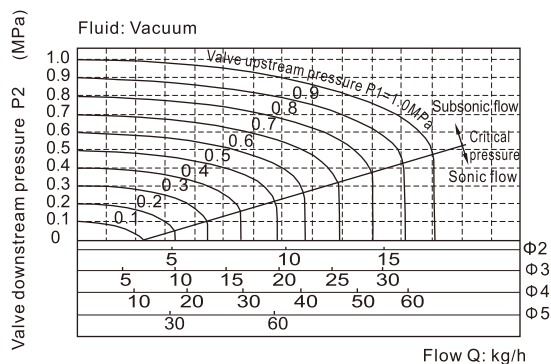


Dimensions


2KL□030(Terminal)

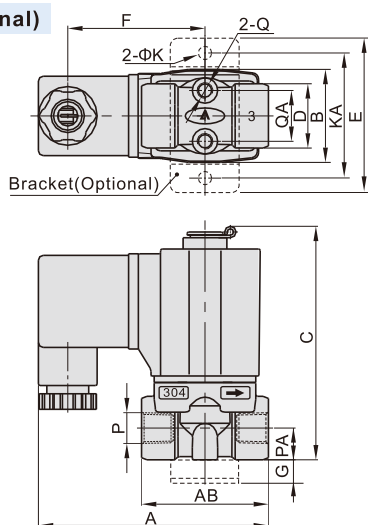


2KL□030(Grommet)

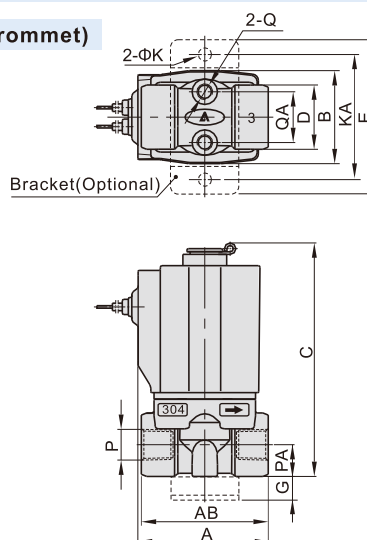

2KL□050(Terminal)

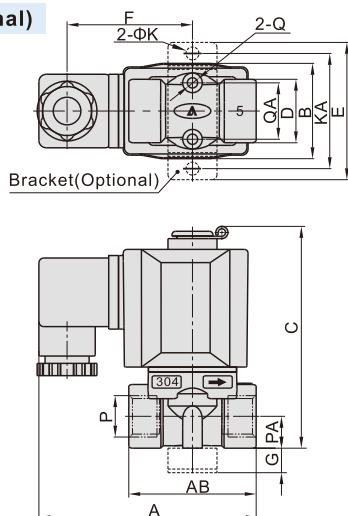

2KL□050(Grommet)

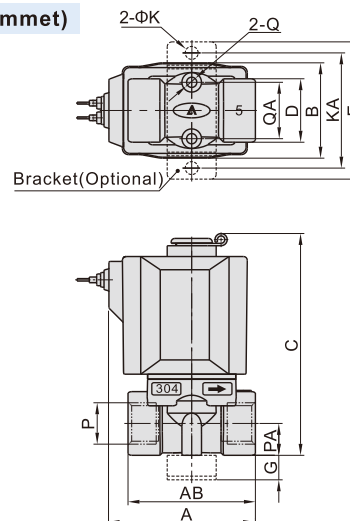


Model\Item	A	AB	B	C	D	E	F	G	K	KA	P	PA	Q	QA
2KL□030-06	72.5	40	29.5	76	20	49	43.5	10	5.3	40	1/8"	10	M5	16
2KL□030-08	72.5	40	29.5	76	20	49	43.5	10	5.3	40	1/4"	10	M5	16
2KL□050-10	89.5	52	39	92	26	56	51	10	5.3	48	3/8"	13	M5	23
2KL□050-15	89.5	52	39	92	26	56	51	10	5.3	48	1/2"	13	M5	23

Model\Item	A	AB	B	C	D	E	G	K	KA	P	PA	Q	QA
2KL□030-06	41	40	29.5	76	20	49	10	5.3	40	1/8"	10	M5	16
2KL□030-08	41	40	29.5	76	20	49	10	5.3	40	1/4"	10	M5	16
2KL□050-10	60	52	39	92	26	56	10	5.3	48	3/8"	13	M5	23
2KL□050-15	60	52	39	92	26	56	10	5.3	48	1/2"	13	M5	23

Fluid control valve(2/2 way)

2KL Series (Internally piloted and normally opened)

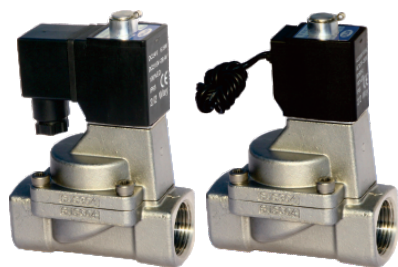

Symbol




Product feature

1. Indirect acting (Internal pilot) and normally opened type 2/2 way solenoid valve. Its high sensibility allows it to change direction quickly.
2. It is compact, small size and light weight. It is easy to install and dismantle.
3. The valve body is made of SUS304. Its coil has a Heat resistance classification of Class H. The standard seal material is PTFE (Teflon) which is suitable for a variety of working medium such as water with high temperature and vapour.
4. The protection class of the coil is IP65 and there is a choice for grommet or terminal electrical entry.

Inner structure

2KL150(Grommet)

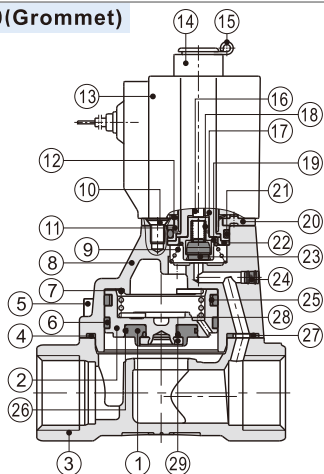

No.	Item	No.	Item
1	Gasket	16	Man drill
2	Piston	17	Electromagnet
3	Body	18	Spring
4	Gasket	19	Airtight bush
5	Screw	20	Fixed plate
6	Wear ring	21	O-ring
7	Spring	22	Fixed ring
8	Cover	23	Airtight ring
9	Spring	24	Plug
10	Screw	25	Spring
11	Fixed cap	26	O-ring
12	Bead flange	27	Bush
13	Coil assembly	28	O-ring
14	Position ring	29	Fixed ring
15	E Clip		

Specification

Model\Item	Port size [Note1]	Orifice size (Φmm)	Cv	Valid area or section (mm ²)	Weight [Note2](g)	Operating pressure differential		Proof pressure	
						MPa	psi	MPa	psi
2KL150-15	1/2"	15.0	5.50	100.0	675	Max: 0.7 Min: 0.05	Max: 100 Min: 10	1.5	220
2KL200-20	3/4"	20.0	9.50	170.0	880				
2KL250-25	1"	25.0	12.50	220.0	1125				
2KL320-32	1 1/4"	35.0	23.00	420.0	2710				
2KL400-40	1 1/2"	40.0	31.00	560.0	3260				
2KL500-50	2"	50.0	49.00	880.0	4310				

[Note1] G thread is available.

[Note2] The weight in the table is the terminal valve's weight, 2KL150~250 series grommet valve's weight is 10g less than terminal's. 2KL320~500 series grommet valve's weight is 20g less than terminal's.

Specification of coil

Valve type	Coil type	Power type	Frequency (Hz)	Voltage range	Electrical entry	Power Consumption (VA/W)	Insulation	Temp. rise(°C)
2KL150	CDA116 CLA116	AC	50	± 15 %	Terminal (CDA)	15.0VA	Class H	50
2KL200			60			11.0VA		40
2KL250		DC	—	± 10 %		6.5W		30
2KL320	CDA170 CLA170		AC	50	Grommet (CLA)	35.0VA		65
2KL400		60		± 15 %		30.0VA		60
2KL500		DC	—	± 10 %		10.5W		40

Valve's specification

Acting	Internally piloted				
Initial state	Normally opened				
Adaptable fluid	Steam, High temperature Water, Oil				
Viscosity limit	Under 20CST				
Ambient and fluid temperature (°C)		Oil	Water	Steam	Ambient
	Max.	150	150	183	100
	Min.	-10 [Note1]	1	—	-20

[Note1] 50CST or less.

Ordering code

Ordering code of valves

2KL 150 15 A □ G					
	1	2	3	4	5
① Model	② Orifice size	③ Port size	④ Voltage	⑤ Electrical entry	⑥ Thread type
2KL: 2/2 way internally piloted and normally opened	150: Φ15mm	15: 1/2"	A: AC220V B: DC24V C: AC110V E: AC24V F: DC12V	Blank: Terminal I: Grommet	G: G Thread
	200: Φ20mm	20: 3/4"			
	250: Φ25mm	25: 1"			
	320: Φ35mm	32: 1 1/4"			
	400: Φ40mm	40: 1 1/2"			
	500: Φ50mm	50: 2"			

Ordering code of accessories



Ordering code of accessories is the same as 2S series valve's, Please refer to P157 for details of ordering code.

[Note] 320\400\500 series valves do not have mounting accessories.

Fluid control valve(2/2 way)


2KL Series (Internally piloted and normally opened)

Flow chart

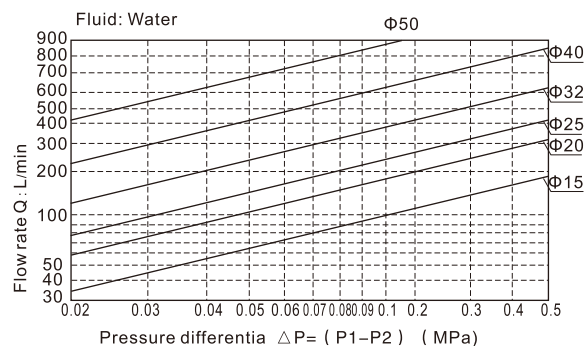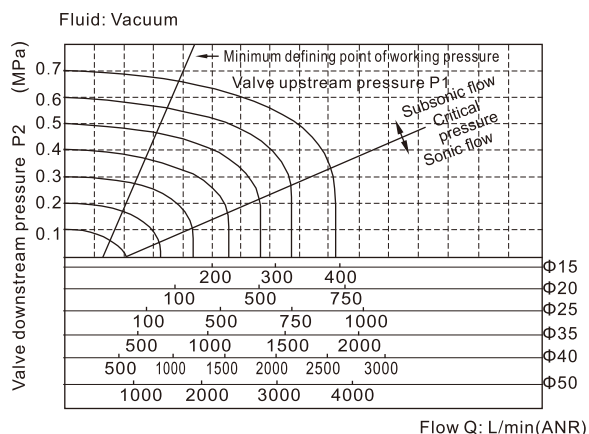


Dimensions


2KL150~250(Terminal)

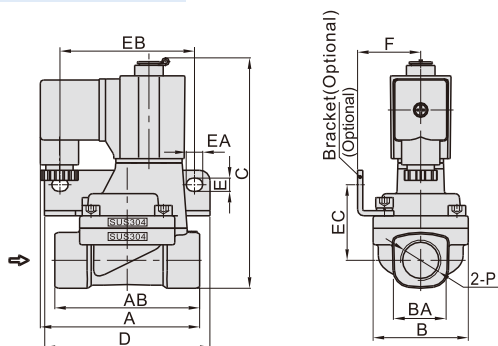


2KL150~250(Grommet)

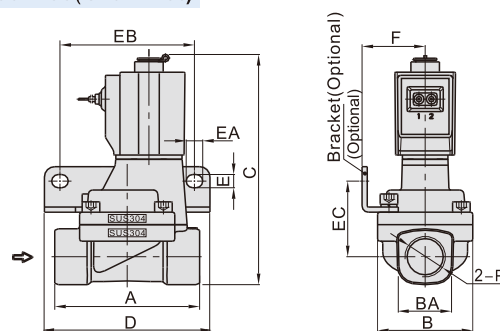

2KL320~500(Terminal)

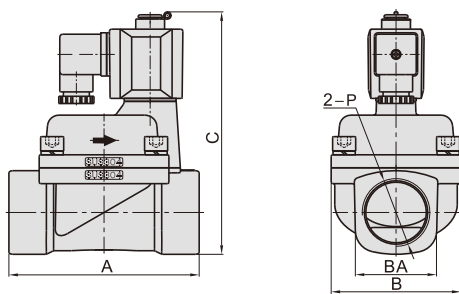

2KL320~500(Grommet)

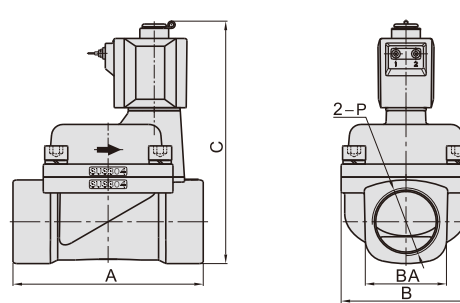

Model\Item	A	AB	B	BA	C	D	E	EA	EB	EC	F	P
2KL150-15	77	70	46	27.5	112.5	80	6.4	8	65	36.5	30.5	1/2"
2KL200-20	78.5	82	53	33.5	121	90	6.4	8	75	40	34	3/4"
2KL250-25	81	92	59	40.5	129.5	95	6.4	8	80	44.5	36	1"
2KL320-32	125	-	80	52	160	-	-	-	-	-	-	1 1/4"
2KL400-40	132	-	90	58	167	-	-	-	-	-	-	1 1/2"
2KL500-50	150	-	100	70	182	-	-	-	-	-	-	2"

Model\Item	A	B	BA	C	D	E	EA	EB	EC	F	P
2KL150-15	70	46	27.5	112.5	80	6.4	8	65	36.5	30.5	1/2"
2KL200-20	82	53	33.5	121	90	6.4	8	75	40	34	3/4"
2KL250-25	92	59	40.5	129.5	95	6.4	8	80	44.5	36	1"
2KL320-32	125	80	52	160	-	-	-	-	-	-	1 1/4"
2KL400-40	132	90	58	167	-	-	-	-	-	-	1 1/2"
2KL500-50	150	100	70	182	-	-	-	-	-	-	2"

Fluid control valve(2/2way)


Coil and accessories



Hookup

Coil's type			Hookup	Connector's type
116 Series	CDA116 (Terminal)	AC		PI2925
		DC		
	CLA116 (Grommet)	AC		-
		DC		
170 Series	CDA170 (Terminal)	AC		PL3030
		DC		
	CLA170 (Grommet)	AC		-
		DC		

How to use connector



Specification

Model\Item	Power type	Voltage (V)	Frequency (Hz)	Voltage range	Electrical entry	Power Consumption (VA/W)		Insulation	Temp.rise(℃)	
						For NC	For NO		NC	NO
116 Series	AC	220	50	± 15%	DIN Terminal Grommet	10.0VA	15.0VA	Class B Class H	35	50
			60			8.0VA	11.0VA		30	40
		110	50			10.0VA	15.0VA		35	50
			60			8.0VA	11.0VA		30	40
		24	50			10.0VA	15.0VA		35	50
			60			8.0VA	11.0VA		30	40
	DC	24	—	± 10%		6.5W			30	30
		12								
170 Series	AC	220	50	± 15%	DIN Terminal Grommet	25.0VA	35.0VA	Class H	60	65
			60			22.0VA	30.0VA		55	60
		110	50			25.0VA	35.0VA		60	65
			60			22.0VA	30.0VA		55	60
		24	50			25.0VA	35.0VA		60	65
			60			22.0VA	30.0VA		55	60
	DC	24	—	± 10%		10.5W			40	40
		12								

How to select coil

Valve type\Coil type		116 Series		170 Series	
		Class B	Class H	Class B	Class H
2W□030\2KW□030	2S□030\2KS□030	●	×	×	×
2L□030	2KL□030	×	●	×	×
2W□050\2KW□050	2S□050\2KS□050	×	×	●	×
2L□050	2KL□050	×	×	×	●
2W150~250\2KW150~250	2S150~250\2KS150~250	●	×	×	×
2L150~250	2KL150~250	×	●	×	×
2S320~500	2KS320~500	×	×	●	×
2L320~500	2KL320~500	×	×	×	●

How to select accessories

Valve type\Accessories type			F-2S030LB	F-2S050LB	F-2S150LB	F-2S200LB	F-2S250LB
2W□030\2KW□030	2S□030\2KS□030	2L□030\2KL□030	●	×	×	×	×
2W□050\2KW□050	2S□050\2KS□050	2L□050\2KL□050	×	●	×	×	×
2W150\2KW150	2S150\2KS150	2L150\2KL150	×	×	●	×	×
2W200\2KW200	2S200\2KS200	2L200\2KL200	×	×	×	●	×
2W250\2KW250	2S250\2KS250	2L250\2KL250	×	×	×	×	●
2S320~500\2KS320~500	2L320~500\2KL320~500		×	×	×	×	×

Ordering code of coil

CD A116 A □

① ② ③ ④

① Coil type	② Coil's bore	③ Voltage	④ Temperature resistance class of coil
CD: Terminal CL: Grommet	A116: Coil Specification(Bore sizeΦ11.6mm) A170: Coil Specification(Bore sizeΦ17.0mm)	A: AC220V B: DC24V C: AC110V E: AC24V F: DC12V	Blank: B Class H: H Class