


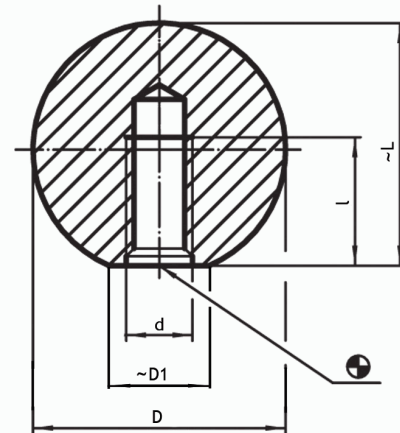

Omschrijving

Materiaal:

- knop: Bakeliet (PF 31); staal; mat gestraald RVS 303 (1.4305); aluminium;
- boring: blinde getapte boring.

Kenmerken:

- kleur: zwart (RAL 9005); rood (RAL 3003);
- temperatuurbereik: tot maximaal 110°C;
- naadloos, gepolijst;
- DIN 319, vorm C.

Artikelnummer	D	d	D1	L	I	Kleur	Materiaal
AB20.0415.0160	16	M4	8	15,0	7,0		Aluminium
AB20.0423.0160	16	M4	8	15,0	7,0		RVS
AB20.0446.0160	16	M4	8	15,0	7,0	zwart	PF 31
AB20.0446.0163	16	M4	8	15,0	7,0	rood	PF 31
AB20.0505.0160	16	M4	8	15,0	7,0		Staal
AB20.0505.0200	20	M5	12	18,0	9,0		Staal
AB20.0515.0200	20	M5	12	18,0	9,0		Aluminium
AB20.0523.0200	20	M5	12	18,0	11,0		RVS
AB20.0546.0200	20	M5	12	18,0	9,0	zwart	PF 31
AB20.0546.0203	20	M5	12	18,0	9,0	rood	PF 31
AB20.0605.0250	25	M6	15	22,5	11,0		Staal
AB20.0615.0250	25	M6	15	22,5	11,0		Aluminium
AB20.0623.0250	25	M6	15	22,5	11,0		RVS
AB20.0646.0250	25	M6	15	22,5	11,0	zwart	PF 31
AB20.0646.0253	25	M6	15	22,5	11,0	rood	PF 31
AB20.0805.0320	32	M8	18	29,0	14,5		Staal
AB20.0815.0320	32	M8	18	29,0	14,5		Aluminium
AB20.0823.0320	32	M8	18	29,0	14,5		RVS
AB20.0846.0320	32	M8	18	29,0	14,0	zwart	PF 31
AB20.0846.0323	32	M8	18	29,0	14,0	rood	PF 31
AB20.1005.0400	40	M10	22	37,0	18,0		Staal
AB20.1015.0400	40	M10	22	37,0	18,0		Aluminium
AB20.1023.0400	40	M10	22	37,0	10,0		RVS
AB20.1046.0400	40	M10	22	37,0	18,0	zwart	PF 31
AB20.1046.0403	40	M10	22	37,0	18,0	rood	PF 31
AB20.1205.0500	50	M12	27	46,0	21,0		Aluminium
AB20.1215.0500	50	M12	27	46,0	21,0		RVS
AB20.1246.0500	50	M12	28	46,0	21,0	zwart	PF 31

Artikelnummer	D	d	D1	L	I	Kleur	Materiaal
AB20.1246.0503	50	M12	28	46,0	21,0	rood	PF 31

