


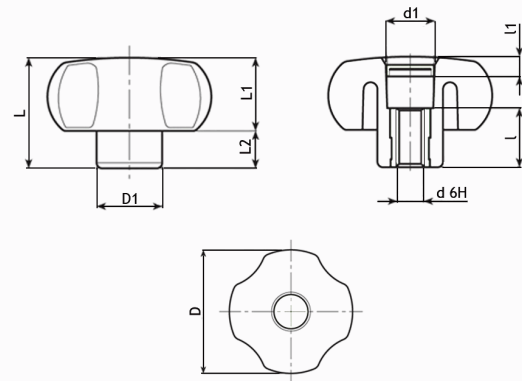

Omschrijving

Material:

- **knob:** reinforced polyamide (PA-GF); oils and greases resistant;
- **insert:** right through brass threaded bush (tolerance 6H).

Chacteristics:

- **surface:** satin;
- **color:** black (RAL 9011);
- **central cap:** grey polyamide (RAL 7035);
- **alternative cap colour:** orange (RAL 2004); blue (RAL 5015); yellow (RAL 1021); red (RAL 3000); green (RAL 6024); black (RAL 9011); contact us for more information;
- temperature range from a minimum of -20°C to a maximum of 135°C.

Special request:

It is possible to supply the knob with cap and threaded female insert in colours as shown in the table on request and for quantities.

Artikelnummer	D	d	D1	d1	L	L1	L2	I	I1	Materiaal
AB64.1037.0410	40,5	M10	17,5	18	29,5	18,5	11	18	7,5	PA-GF / Staal
AB64.1237.0410	40,5	M12	21,0	18	29,5	18,5	11	18	7,5	PA-GF / Staal
AB64.0537.0410	40,5	M5	15,5	18	29,5	18,5	11	18	7,5	PA-GF / Staal
AB64.0637.0410	40,5	M6	15,5	18	29,5	18,5	11	18	7,5	PA-GF / Staal
AB64.0837.0410	40,5	M8	15,0	18	29,5	18,5	11	18	7,5	PA-GF / Staal
AB64.1037.0520	49,0	M10	20,5	20	32,0	21,5	11	18	7,5	PA-GF / Staal
AB64.1237.0520	49,0	M12	20,5	20	32,0	21,5	11	18	7,5	PA-GF / Staal
AB64.0637.0520	49,0	M6	20,5	20	32,0	21,5	11	18	7,5	PA-GF / Staal
AB64.0837.0520	49,0	M8	20,5	20	32,0	21,5	11	18	7,5	PA-GF / Staal
AB64.1037.0590	59,0	M10	23,0	22	40,0	25,0	15	18	7,5	PA-GF / Staal
AB64.1237.0590	59,0	M12	23,0	22	40,0	25,0	15	18	7,5	PA-GF / Staal
AB64.1437.0590	59,0	M14	23,0	22	40,0	25,0	15	18	7,5	PA-GF / Staal
AB64.0837.0590	59,0	M8	23,0	22	40,0	25,0	15	18	7,5	PA-GF / Staal