


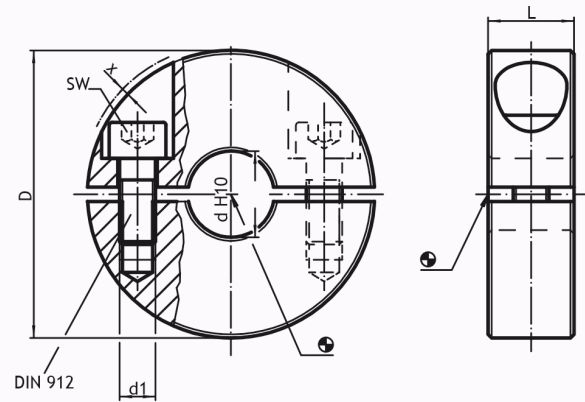

Omschrijving

Materiaal:

- schroef: staal; RVS;
- stelring: staal, gezwart, stoom geoxideerd; RVS 316L (1.4404).

Kenmerken:

- de stelringen kunnen universeel gebruikt worden;
- stelringen met sterke klemkracht.

Artikelnummer	d	D	d1	L	x	SW	Materiaal
BB29.0609.0200	6	20	M3	9	1,2	2,5	Staal
BB29.0615.0200	6	20	M3	9	1,2	2,5	RVS
BB29.0809.0220	8	22	M3	9	1,0	2,5	Staal
BB29.0815.0220	8	22	M3	9	1,0	2,5	RVS
BB29.1009.0260	10	26	M4	11	1,6	3,0	Staal
BB29.1015.0260	10	26	M4	11	1,6	3,0	RVS
BB29.1209.0300	12	30	M4	11	0,7	3,0	Staal
BB29.1215.0300	12	30	M4	11	0,7	3,0	RVS
BB29.1409.0320	14	32	M4	11	0,7	3,0	Staal
BB29.1415.0320	14	32	M4	11	0,7	3,0	RVS
BB29.1509.0360	15	36	M5	13	1,4	4,0	Staal
BB29.1515.0360	15	36	M5	13	1,4	4,0	RVS
BB29.1609.0360	16	36	M5	13	1,4	4,0	Staal
BB29.1615.0360	16	36	M5	13	1,4	4,0	RVS
BB29.1809.0420	18	42	M5	15	0,6	4,0	Staal
BB29.1815.0420	18	42	M5	15	0,6	4,0	RVS
BB29.2009.0420	20	42	M5	15	0,6	4,0	Staal
BB29.2015.0420	20	42	M5	15	0,6	4,0	RVS
BB29.2209.0480	22	48	M5	15	0,0	4,0	Staal
BB29.2215.0480	22	48	M5	15	0,0	4,0	RVS
BB29.2509.0480	25	48	M5	15	0,0	4,0	Staal
BB29.2515.0480	25	48	M5	15	0,0	4,0	RVS
BB29.2809.0550	28	55	M6	15	0,5	5,0	Staal
BB29.2815.0550	28	55	M6	15	0,5	5,0	RVS
BB29.3009.0550	30	55	M6	15	0,5	5,0	Staal
BB29.3015.0550	30	55	M6	15	0,5	5,0	RVS
BB29.3209.0600	32	60	M6	15	0,4	5,0	Staal
BB29.3215.0600	32	60	M6	15	0,4	5,0	RVS
BB29.3509.0600	35	60	M6	15	0,4	5,0	Staal
BB29.3515.0600	35	60	M6	15	0,4	5,0	RVS

Artikelnummer	d	D	d1	L	x	SW	Materiaal
BB29.4009.0650	40	65	M6	15	0,5	5,0	Staal
BB29.4015.0650	40	65	M6	15	0,5	5,0	RVS

