


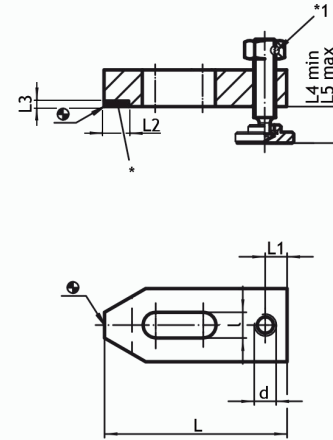

Description

Material:

- soft face: brass brazed;
- clamp: heat-treated steel, blackened.

Characteristics:

- the combination of nut DIN 6330 B (CH15)/conical seat DIN 6319 G (HC02, type 2) on the clamping bolt and thrust pad DIN 6311 (BG10 removable) on the adjusting screw compensates for the lack of parallelity;
- the clamp can be used either way (soft or hard clamping surface);
- l in the table represents the nominal size (mm);
- L4 in the table represents the minimum clamping height (mm);
- L5 in the table represents the maximum clamping height (mm);
- other dimensions according to DIN 6314 (HA01);
- * stands for: soft nose;
- *1 stands for: cemented.

Article Code	l	d	L	L1	L2	L3	L4	L5	Material
HA10.1519.0600	9	M8	60	8	10	2	8	15	Steel
HA10.1519.0601	9	M8	60	8	10	2	8	45	Steel
HA10.2019.0800	11	M10	80	10	12	2	10	22	Steel
HA10.2019.0801	11	M10	80	10	12	2	10	57	Steel
HA10.3519.1000	14	M12	100	12	15	3	10	26	Steel
HA10.3519.1003	14	M12	100	12	15	3	10	71	Steel
HA10.4519.1251	18	M16	125	16	20	3	12	30	Steel
HA10.4519.1253	18	M16	125	16	20	3	12	90	Steel