
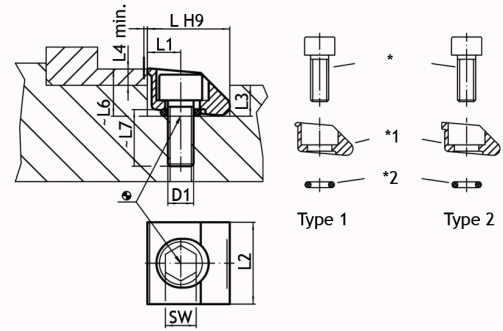


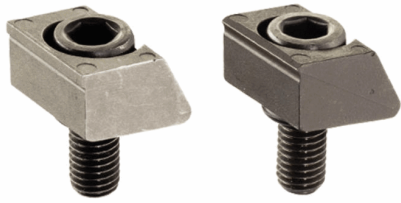

Description

Material:

- body: steel, hardened;
- screw: heat-treated steel, heat treated;
- o-ring: nitrile rubber (NBR).

Characteristics:

- pitbull® clamps for low mounting height with a high clamping force and hold down effect ;
- the O-ring serves to lift the clamp off when releasing;
- type 1: with knife edge;
- type 2: with blunt edge;
- L5 in the table represents the clamping way (mm)
- F1 (kN) in the table represents the maximum clamping force;
- M (Nm) in the table represents the maximum tightening torque;
- temperature range from a minimum of -30°C to a maximum of 80°C.

Article Code	D1	L2	L	L1	L3	L4	L5	L6	L7	M	F1(kN)	Type	Material
HE03.1006.0000	M10	25,4	25,40	10,2	11,4	6,4	1,2	17,8	17	80	15,0	1	Steel
HE03.1006.0010	M10	25,4	25,40	10,2	11,4	6,4	1,2	17,8	17	80	15,1	2	Steel
HE03.1206.0000	M12	38,1	38,10	15,2	16,3	9,5	1,9	25,8	21	140	20,8	1	Steel
HE03.1206.0010	M12	38,1	38,10	15,2	16,3	9,5	1,9	25,8	21	140	22,0	2	Steel
HE03.0406.0000	M4	12,7	12,70	5,1	4,8	2,6	0,4	7,4	8	6	2,6	1	Steel
HE03.0406.0010	M4	12,7	12,70	5,1	4,8	2,6	0,4	7,4	8	6	2,6	2	Steel
HE03.0606.0000	M6	19,1	19,05	7,6	7,1	3,8	0,6	10,9	11	17	3,8	1	Steel
HE03.0606.0010	M6	19,1	19,05	7,6	7,1	3,8	0,6	10,9	11	17	5,7	2	Steel

