
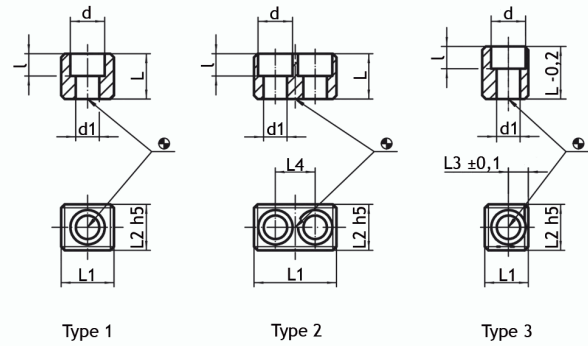


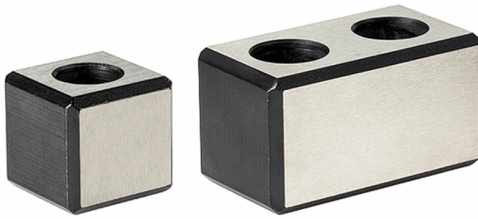

Description

Material:

·alloyed case-hardened steel, case hardened, blackened, ground.

Characteristics:

- type 1: for spindle heads no. 30 to 60, form A;
- type 2: for spindle heads no. 60 form B;
- for spindle heads no. 30 to 50, form C;
- x in the table represents the spindle head number;
- x1 in the table represents for wich screws (ISO 4762) the drive block is suitable.

Article Code	x	L1	L2	d	d1	L	L3	L4	I	x1	Type	Material
HG34.1006.0500	50 - 55	26,5	25,4	19,0	13,0	25,0			12,3	M12 x 25	1	Steel
HG34.3006.0300	30	13,5	15,9	10,4	6,4	24,5	5,5		6,2	M6 x 25	3	Steel
HG34.1006.0300	30	16,5	15,9	10,4	6,4	16,0			6,2	M6 x 16	1	Steel
HG34.3006.0400	40	16,5	15,9	10,4	6,4	24,5	7,0		6,2	M6 x 25	3	Steel
HG34.1006.0400	40	19,5	15,9	10,4	6,4	16,0			6,2	M6 x 16	1	Steel
HG34.3006.0450	45	17,5	19,0	13,5	8,4	26,0	7,5		10,0	M8 x 25	3	Steel
HG34.1006.0450	45	19,5	19,0	13,5	8,4	19,0			8,3	M8 x 20	1	Steel
HG34.3006.0500	50	24,0	25,4	19,0	13,0	29,0	11,0		12,3	M12 x 30	3	Steel
HG34.1006.0600	60	45,5	25,4	19,0	13,0	25,0			12,3	M12 x 25	1	Steel
HG34.2006.0600	60	45,5	25,4	19,0	13,0	25,0		22	12,3	M12 x 25	2	Steel

